

Killingworth Volunteer Fire Company

Cab and Chassis Specification

MODEL

The chassis shall be a Metro Star MFD model. The cab and chassis shall include design considerations for multiple emergency vehicle applications, rapid transit and maneuverability. The chassis shall be manufactured for heavy duty service with the strength and capacity to support a fully laden apparatus, one hundred (100) percent of the time.

MODEL YEAR

The chassis shall have a vehicle identification number that reflects a 2022 model year.

COUNTRY OF SERVICE

The chassis shall be put in service in the country of United States of America (USA).

The chassis will meet applicable U.S.A. federal motor vehicle safety standards per CFR Title 49 Chapter V Part 571 as clarified in the incomplete vehicle book per CFR Title 49 Chapter V Part 568 Section 4 which accompanies each chassis. Spartan Chassis is not responsible for compliance to state, regional, or local regulations. Dealers should identify those regulations and order any necessary optional equipment from Spartan Chassis or their OEM needed to be in compliance with those regulations.

CAB AND CHASSIS LABELING LANGUAGE

The cab and chassis shall include the applicable caution, warning, and safety notice labels with text to be written in English. All applicable caution, warning, and safety notice labels shall be Innovative Controls brand. Where applicable to the location within the specific layout and label package of the cab and chassis, the labels shall include decorative chrome bezels. Designs shall include bezels that fit individual labels or packaged configurations of labels in certain common locations.

The following labels shall be Innovative Controls brand, each including a decorative chrome bezel (where applicable):

- Shoreline
- Aerial Stowed
- Aerial Breakers 2
- Air Conditioner
- Cab Tilt Plate
- Air Compressor Breaker
- Battery Conditioner Breaker
- Helmet Caution
- Horn Tag
- Q2B Tag
- Load Center Plate
- Not a Step Label

Killingworth Volunteer Fire Company

- Occupancy Tag
- Do Not Move
- Occupants Must Be Seated
- Do Not Stand
- Danger Do Not Weld
- Danger--Untrained Operator
- Def Tag, including any additional labels selected in the 2907- subcat
- Battery Direct
- Kneeling
- IFS Air Fault
- Engine Brake
- Retarder
- LR 100 Amp Node
- 300 Amp EPU
- 100 Amp Front O/R Node
- 100 Amp T/T Node
- 100 Amp RR O/R Node
- 10 Amp EPU
- Master Power
- 12 Volt Power
- Aerial Hours
- Pump In Drive
- Windshield Washer Fluid

APPARATUS TYPE

The apparatus shall be a rescue vehicle designed for emergency service use which shall include the functions of a multipurpose vehicle which primarily provides support services at emergency scenes.

VEHICLE TYPE

The chassis shall be manufactured for use as a straight truck type vehicle and designed for the installation of a permanently mounted apparatus behind the cab. The apparatus of the vehicle shall be supplied and installed by the apparatus manufacturer.

VEHICLE ANGLE OF APPROACH PACKAGE

The angle of approach of the apparatus shall be a minimum of 8.00 degrees.

NFPA1901 Angle of Approach definition:

“To determine the angle of approach, place a thin steel strip against the front of the tires where they touch the ground or stretch a tight string from one front tire to the other at the front where they touch the ground. Determine the lowest point (component or equipment) on the vehicle forward of the front tire that would make the smallest angle of approach.

Killingworth Volunteer Fire Company

Hang a plumb bob from the lowest point and mark the point on the ground where the point of the plumb bob touches. Measure the vertical distance from the ground to the point where the plumb bob was hung (distance V). Measure the horizontal distance from the plumb bob point to the steel strip or string running from front tire to front tire (distance H). Divide the vertical distance by the horizontal distance. The ratio of V/H is the tangent of the angle of approach. If the ratio is known, the angle of approach can be determined from a table of trigonometric functions of angles or from a math calculator. The standard requires a minimum angle of approach of 8.00 degrees: since the tangent of 8.00 degrees is 0.1405, if V divided by H is 0.1405 or larger, the angle of approach is 8.00 degrees or greater.”

AXLE CONFIGURATION

The chassis shall feature a 4 x 2 axle configuration consisting of a single rear drive axle with a single front steer axle.

GROSS AXLE WEIGHT RATINGS FRONT

The front gross axle weight rating (GAWR) of the chassis shall be 20,000 pounds.

This front gross axle weight rating shall be adequate to carry the weight of the completed apparatus including all equipment and personnel.

GROSS AXLE WEIGHT RATINGS REAR

The rear gross axle weight rating (GAWR) of the chassis shall be 27,000 pounds.

This rear gross axle weight rating shall be adequate to carry the weight of the completed apparatus including all equipment and personnel.

CAB STYLE

The cab shall be a custom, fully enclosed, MFD model with a flat roof over the driver, officer, and crew area, designed and built specifically for use as an emergency response vehicle by a company specializing in cab and chassis design for all emergency response applications. The cab shall be designed for heavy-duty service utilizing superior strength and capacity for the application of protecting the occupants of the vehicle. This style of cab shall offer up to eight (8) seating positions.

The cab shall incorporate a fully enclosed design with side wall roof supports, allowing for a spacious cab area with no partition between the front and rear sections of the cab. To provide a superior finish by reducing welds that fatigue cab metal; the roof, the rear wall and side wall panels shall be assembled using a combination of welds and proven industrial adhesives designed specifically for aluminum fabrication for construction.

The cab shall be constructed using multiple aluminum extrusions in conjunction with aluminum plate, which shall provide proven strength and the truest, flattest body surfaces ensuring less expensive paint repairs if needed. All aluminum welding shall be completed to the American Welding Society and ANS I D1.2-96 requirements for structural welding of aluminum.

Killingworth Volunteer Fire Company

All interior and exterior seams shall be sealed for optimum noise reduction and to provide the most favorable efficiency for heating and cooling retention.

The cab shall be constructed of 5052-H32 corrosion resistant aluminum plate. The cab shall incorporate tongue and groove fitted 6061-T6 0.13 & 0.19 inch thick aluminum extrusions for extreme duty situations. A single formed, one (1) piece extrusion shall be used for the "A" pillar, adding strength and rigidity to the cab as well as additional roll-over protection. The cab side walls and lower roof skin shall be 0.13 inch thick; the rear wall and raised roof skins shall be 0.09 inch thick; the front cab structure shall be 0.19 inch thick.

The exterior width of the cab shall be 94.00 inches wide with a minimum interior width of 88.00 inches. The overall cab length shall be 131.10 inches with 54.00 inches from the centerline of the front of the axle to the back of the cab.

The cab interior shall be designed to afford the maximum usable interior space and attention to ergonomics with hip and legroom while seated which exceeds industry standards. The crew cab floor shall be flat across the entire walking area for ease of movement inside the cab.

The cab shall offer an interior height of 57.50 inches from the front floor to the headliner and a rear floor to headliner height of 55.00 inches at a minimum. The cab shall offer an interior measurement at the floor level from the rear of the engine tunnel to the rear wall of the cab of 51.88 inches. All interior measurements shall include the area within the interior trimmed surfaces and not to any unfinished surface.

The cab shall include a driver and officer area with two (2) cab doors large enough for personnel in full firefighting gear. The front doors shall offer a clear opening of 40.25 inches wide X 53.50 inches high, from the cab floor to the top of the door opening. The cab shall also include a crew area with up to two

(2) cab doors, also large enough for personnel in full firefighting gear. The rear doors shall offer a clear opening of 32.25 inches wide X 51.00 inches high, from the cab floor to the top of the door opening.

The cab shall incorporate a progressive two (2) step configuration from the ground to the cab floor at each door opening. The progressive steps are vertically staggered and extend the full width of each step well allowing personnel in full firefighting gear to enter and exit the cab easily and safely.

The first step for the driver and officer area shall measure approximately 11.50 inches deep X 31.13 inches wide. The intermediate step shall measure approximately 8.50 inches deep X 32.50 inches wide. The height from the first step to the intermediate step and the intermediate step to the cab floor shall not exceed 11.00 inches.

The first step for the crew area shall measure approximately 11.50 inches deep X 20.44 inches wide. The intermediate step shall measure approximately 10.25 inches deep X 22.75 inches wide. The height from the first step to the intermediate step and the intermediate step to the cab floor shall not exceed 12.80 inches.

Killingworth Volunteer Fire Company

OCCUPANT PROTECTION

The vehicle shall include the Advanced Protection System™ (APS) which shall secure belted occupants and increase the survivable space within the cab. The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

The system components shall include:

- Driver steering wheel airbag
- Driver dual knee air bags (patent pending) with energy management mounting (patent pending) and officer knee airbag.
- Large driver, officer, and crew area side curtain airbags
- APS advanced seat belt system - retractor pre-tensioners tighten the seat belts around the occupants, securing the occupants in seats and load limiters play out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries
- Heavy truck Restraints Control Module (RCM) - receives inputs from the outboard sensors, selectively deploys APS systems, and records sensory inputs immediately before and during a detected qualifying event
- Integrated outboard crash sensors mounted at the perimeter of the vehicle - detects a qualifying front or side impact event and monitors and communicates vehicle status and real time diagnostics of all critical subsystems to the RCM
- Fault-indicating Supplemental Restraint System (SRS) light on the driver's instrument panel

Frontal impact protection shall be provided by the outboard sensors and the RCM. In a qualifying front impact event the outboard sensors provide inputs to the RCM. The RCM activates the steering wheel airbag, driver side dual knee airbags (patent pending), officer side knee airbag, and advanced seat belts for each occupant in the cab.

Rollover, side impact, and ejection mitigation shall be provided by the outboard sensors and the RCM. In qualifying rollover or side impact events the outboard sensors provide inputs to the RCM. The RCM activates the side curtain airbags and advanced seat belts for each occupant in the cab. The RCM measures roll angle, lateral acceleration, and roll rate to determine if a rollover event or side impact event is imminent or occurring.

In the event of a qualifying offset or other non-frontal impact, the RCM shall determine and intelligently deploy the front impact protection system, the side impact protection system, or both front and side impact protection systems based on the inputs received from the outboard crash sensors.

Killingworth Volunteer Fire Company

CAB FRONT FASCIA

The front cab fascia shall be constructed of 5052-H32 Marine Grade, 0.13 of an inch thick aluminum plate which shall be an integral part of the cab.

The cab fascia will encompass the entire front of the aluminum cab structure from the bottom of the windshield to the bottom of the cab and shall be the "Classic" design.

The front cab fascia shall include two (2) molded plastic modules on each side accommodating a total of up to four (4) Hi/Low beam headlights and two (2) turn signal lights or up to four (4) warning lights. A chrome plated molded plastic bezel shall be provided on each side around each set of four lamps.

FRONT GRILLE

The front fascia shall include a box style, 304 stainless steel front grille 44.45 inches wide X 33.50 inches high X 1.50 inches deep. The grille shall include a minimum free air intake of 732.00 square inches. The upper portion of the grille shall be hinged to provide service access behind the grille.

The center of the grill will have metal number 8 painted blue that will hinge with the grill.

CAB UNDERCOAT

There shall be a rubberized undercoating applied to the underside of the cab that provides abrasion protection, sound deadening and corrosion protection.

CAB SIDE DRIP RAIL

There shall be a drip rail along the top radius of each cab side. The drip rails shall help prevent water from the cab roof running down the cab side.

CAB PAINT EXTERIOR

The cab shall be painted prior to the installation of glass accessories and all other cab trim to ensure complete paint coverage and the maximum in corrosion protection of all metal surfaces.

All metal surfaces on the entire cab shall be ground by disc to remove any surface oxidation or surface debris which may hinder the paint adhesion. Once the surface is machine ground a high quality acid etching of base primer shall be applied. Upon the application of body fillers and their preparation, the cab shall be primed with a coating designed for corrosion resistance and surface paint adhesion. The maximum thickness of the primer coat shall be 2.00 mils.

The entire cab shall then be coated with an intermediate solid or epoxy surfacing agent that is designed to fill any minor surface defects, provide an adhesive bond between the primer and the paint and improve the color and gloss retention of the color. The finish to this procedure shall be a sanding of the cab with 360 grit paper followed by sealing the seams with SEM brand seam sealer.

Killingworth Volunteer Fire Company

The cab shall then be painted the specific color designated by the customer with an acrylic urethane typesystem designed to retain color and resist acid rain and most atmospheric chemicals found on the fire ground or emergency scene. The paint shall have a minimum thickness of 2.00 mils, followed by a clearcoat not to exceed 2.00 mils. The entire cab shall then be baked at 180 degrees for one (1) hour to speed the curing process of the coatings.

CAB PAINT MANUFACTURER

The cab shall be painted with Sikkens paint.

CAB PAINT PRIMARY/LOWER COLOR

The primary/lower paint color shall be: Match Engine 855

CAB PAINT SECONDARY/UPPER COLOR

The secondary/upper paint color shall be: Match Engine 855

CAB PAINT EXTERIOR BREAKLINE

The upper and lower paint shall meet at a break line on the cab which shall be located approximately 1.00 inch below the door windows on each side of the cab. The break line shall curve down at the frontcab corners to approximately 5.00 inches below the windshields on the front of the cab. The break line will match the current engine 855.

CAB PAINT PINSTRIPE

Where the upper and lower paint colors meet a temporary 0.50 inch wide black pinstripe shall be appliedover this break line to offer a more finished look prior to the final pinstripe being installed by the OEM.

CAB PAINT WARRANTY

The cab and chassis shall be covered by a limited manufacturer paint warranty which shall be in effect for ten (10) years from the first owner's date of purchase or in service or the first 100,000 actual miles, whichever occurs first.

The warranty details can be found in the chassis warranty document.

CAB PAINT INTERIOR

The visible interior cab structure surfaces shall be painted with a multi-tone black-black texture finish.

CAB ENTRY DOORS

Killingworth Volunteer Fire Company

The cab shall include four (4) entry doors, two (2) front doors and two (2) crew doors designed for ease of entering and egress when outfitted with an SCBA. The doors shall be constructed of extruded aluminum with a nominal thickness of 0.13 inch. The exterior skins shall be constructed of 0.13 inch aluminum plate.

The doors shall include a double rolled style automotive rubber seal around the perimeter of each door frame and door edge which ensures a weather tight fit.

All door hinges shall be hidden within flush mounted cab doors for a pleasing smooth appearance and perfect fit along each side of the cab. Each door hinge shall be piano style with a 0.38 inch pin and shall be constructed of stainless steel.

CAB ENTRY DOOR TYPE

All cab entry doors shall be full length in design to fully enclose the lower cab steps. Entry doors shall include Pollak mechanical plunger style switches for electrical component activation.

CAB INSULATION

The cab ceiling and walls shall include a nonwoven polyester fiber insulation. The insulation shall act as a barrier absorbing noise as well as assisting in sustaining the desired climate within the cab interior.

CAB STRUCTURAL WARRANTY

Summary of Warranty Terms:

THE FOLLOWING IS SUMMARY OF WARRANTY TERMS FOR INFORMATION ONLY. THE ACTUAL LIMITED WARRANTY TERMS CAN BE FOUND IN THE CHASSIS WARRANTY DOCUMENT, WHICH CONTAINS THE COMPLETE STATEMENT OF THE WARRANTY. SPARTAN'S RESPONSIBILITY IS TO BE ACCORDING TO THE TERMS OF THE COMPLETE LIMITED WARRANTY DOCUMENT.

The cab structure shall be warranted for a period of ten (10) years or one hundred thousand (100,000) miles whichever ever may occur first. The warranty period shall commence on the date the vehicle is delivered to the first end user.

CAB TEST INFORMATION

The cab shall have successfully completed the preload side impact, static roof load application and frontal impact without encroachment to the occupant survival space when tested in accordance with Section 4 of SAE J2420 COE Frontal Strength Evaluation Dynamic Loading Heavy Trucks, Section 5 of SAE J2422 Cab Roof Strength Evaluation Quasi –Static Loading Heavy Trucks and ECE R29 Uniform Provisions Concerning the Approval of Vehicles with regard to the Protection of the Occupants of the Cab of a Commercial Vehicles Annex 3 Paragraph 5.

The above tests have been witnessed by and attested to by an independent third party. The test results were recorded using cameras, high speed imagers, accelerometers and strain gauges.

Killingworth Volunteer Fire Company

Documentation of the testing shall be provided upon request.

ELECTRICAL SYSTEM

The chassis shall include a single starting electrical system which shall include a 12 volt direct current multiplexing system, suppressed per SAE J551. The wiring shall be appropriate gauge cross link with 311 degree Fahrenheit insulation. All SAE wires in the chassis shall be color coded and shall include the circuit number and function where possible. The wiring shall be protected by 275 degree Fahrenheit minimum high temperature flame retardant loom. All nodes and sealed Deutsch connectors shall be waterproof.

OEM WIRING

The wiring system shall include a custom interface harness provided by the chassis manufacturer designed to meet the requirements provided by the OEM. The harness shall include eight (8) 14 gauge wires which shall be routed from under the center dash area to the frame area behind the cab. There shall be a coil provided at the back of the cab with a minimum of 15.00 feet of additional wire provided.

APPARATUS WIRING PROVISION

An apparatus wiring panel shall be installed in the center dash area behind the rocker switch panel which shall include eight (8) open circuits consisting of three (3) 20 amp, one (1) 30 amp, three (3) 10 amp, and one (1) 15 amp circuit, with relays and breakers with trigger wires which shall be routed to the rocker switch panel.

LOAD MANAGEMENT SYSTEM

The apparatus load management shall be performed by the included multiplex system. The multiplex system shall also feature the priority of sequences and shall shed electrical loads based on the priority list specifically programmed.

ACCESSORY POWER

The electrical distribution panel shall include two (2) power studs. The studs shall be size #10 and each of the power studs shall be circuit protected with a fuse of the specified amperage. One (1) power stud shall be capable of carrying up to a 40 amp battery direct load. One (1) power stud shall be capable of carrying up to a 15 amp ignition switched load. The two (2) power studs shall share one (1) #10 ground stud. A 225 amp battery direct power and ground stud shall be provided and installed on the chassis near the left hand battery box for OEM body connections.

AUXILIARY ACCESSORY POWER

An auxiliary set of power and ground studs shall be provided and installed behind the electrical center cover with a 40 amp breaker. The studs shall be 0.38 inch diameter and capable of carrying up to a 40 amp battery direct load.

Killingworth Volunteer Fire Company

ADDITIONAL ACCESSORY POWER

An additional ten (10) position blade type fuse panel shall be installed behind the officer's seat. The fusepanel shall be protected by a 40 amp fuse. The panel shall be capable of carrying up to a maximum 40 amp battery direct load.

EXTRA ACCESSORY POWER

An auxiliary ten (10) position blade type fuse panel shall be installed behind the officer's seat. The fusepanel shall be protected by a 40 amp fuse. The panel shall be capable of carrying up to a maximum 40 amp master switched load.

EXTERIOR ELECTRICAL TERMINAL COATING

All terminals exposed to the elements will be sprayed with a high visibility protective rubberized coatingto prevent corrosion.

ENGINE

The chassis engine shall be a Cummins L9 engine. The L9 engine shall be an in-line six (6) cylinder, fourcycle diesel powered engine. The engine shall offer a rating of 450 horse power at 2100 RPM and shall

be governed at 2200 RPM. The torque rating shall feature 1250 foot pounds of torque at 1200 RPM with543 cubic inches (8.9 liters) of displacement.

The L9 engine shall feature a VGT™ Turbocharger, a high pressure common rail fuel system, fully integrated electronic controls with an electronic governor, and shall be EPA certified to meet the 2021 emissions standards using cooled exhaust gas recirculation and selective catalytic reduction technology.

The engine shall include an engine mounted combination full flow/by-pass oil filter with replaceable spinon cartridge for use with the engine lubrication system. The engine shall include Citgo brand Citgard 500, or equivalent SAE 15W40 CK-4 low ash engine oil which shall be utilized for proper engine lubrication.

A wiring harness shall be supplied ending at the back of the cab. The harness shall include a connectorwhich shall allow an optional harness for the pump panel. The included circuits shall be provided for atachometer, oil pressure, engine temperature, hand throttle, high idle and a PSG system. A circuit for J1939 data link shall also be provided at the back of the cab.

CAB ENGINE TUNNEL

The cab interior shall include an integrated engine tunnel constructed of 5052-H32 Marine Grade, 0.19of an inch thick aluminum. The tunnel shall be a maximum of 41.50 inches wide X 25.50 inches high.

DIESEL PARTICULATE FILTER CONTROLS

Killingworth Volunteer Fire Company

There shall be two (2) controls for the diesel particulate filter. One (1) control shall be for regeneration and one (1) control shall be for regeneration inhibit. Each switch shall include a guard.

ENGINE PROGRAMMING HIGH IDLE SPEED

The engine high idle control shall maintain the engine idle at approximately 1250 RPM when engaged.

ENGINE HIGH IDLE CONTROL

The vehicle shall be equipped with a high-idle speed rocker switch and an automatic high-idle speed control. It shall be pre-set so when activated, it will operate the engine at the appropriate RPM to increase alternator output. This device shall operate only when the engine is running and the transmission is in neutral with the parking brake set. When automatically engaged the high idle shall disengage when the operator depresses the brake pedal, or the transmission is placed in gear, and shall be available to manually or automatically re-engage when the brake is released, or when the transmission is placed in neutral.

ENGINE PROGRAMMING ROAD SPEED GOVERNOR

The engine shall include programming which will govern the top speed of the vehicle.

AUXILIARY ENGINE BRAKE

A compression brake, for the six (6) cylinder engine shall be provided. A cutout relay shall be installed to disable the compression brake when in pump mode or when an ABS event occurs. The engine compression brake shall activate upon 0% accelerator when in operation mode and actuate the vehicle's brake lights.

The engine shall utilize a variable geometry turbo (VGT) as an integrated auxiliary engine brake to offer a variable rate of exhaust flow, which when activated in conjunction with the compression brake shall enhance the engine's compression braking capabilities.

AUXILIARY ENGINE BRAKE CONTROL

An engine compression brake control device shall be included. The electronic control device shall monitor various conditions and shall activate the engine brake only if all of the following conditions are simultaneously detected:

- A valid gear ratio is detected.
- The driver has requested or enabled engine compression brake operation.
- The throttle is at a minimum engine speed position.
- The electronic controller is not presently attempting to execute an electronically controlled final drive gear shift.

The compression brake shall be controlled through an on/off switch and a low/medium/high

Killingworth Volunteer Fire Company

selectorswitch.

ELECTRONIC ENGINE OIL LEVEL INDICATOR

The engine oil shall be monitored electronically and shall send a signal to activate a warning in the instrument panel when levels fall below normal. The warning shall activate in a low oil situation upon turning on the master battery and ignition switches without the engine running.

FLUID FILLS

The front of the chassis shall accommodate fluid fill for the engine oil through the grille. This area shall also accommodate a check for the engine oil. The transmission, power steering, and coolant fluid fills and checks shall be under the cab. The windshield washer fill shall be accessible through the frontleft side mid step.

ENGINE DRAIN PLUG

The engine shall include an original equipment manufacturer installed oil drain plug.

ENGINE WARRANTY

The Cummins engine shall be warranted for a period of five (5) years or 100,000 miles, whichever occurs first.

ENGINE PROGRAMMING REMOTE THROTTLE

The engine ECM (Electronic Control Module) discreet wire remote throttle circuit shall be turned off for use with a J1939 based pump controller or when the discreet wire remote throttle controls are not required.

ENGINE PROGRAMMING IDLE SPEED

The engine low idle speed will be programmed at 700 rpm.

ENGINE COOLING SYSTEM PROTECTION

The engine cooling system shall include a recirculation shield designed to act as a light duty skid plate below the radiator to provide additional protection for the engine cooling system from light impacts, stones, and road debris. The skid plate shall be painted to match the frame components.

ENGINE COOLANT

The cooling package shall include Extended Life Coolant (ELC). The use of ELC provides longer intervals between coolant changes over standard coolants providing improved performance. The

Killingworth Volunteer Fire Company

coolant shall contain a 50/50 mix of ethylene glycol and de-ionized water to keep the coolant from freezing to a temperature of -34 degrees Fahrenheit.

Proposals offering supplemental coolant additives (SCA) shall not be considered, as this is part of the extended life coolant makeup.

ELECTRONIC COOLANT LEVEL INDICATOR

The instrument panel shall feature a low engine coolant indicator light which shall be located in the center of the instrument panel. An audible tone alarm shall also be provided to warn of a low coolant incident.

COOLANT HOSES

The cooling systems hose shall be formed silicone hose and formed aluminized steel tubing and include stainless steel constant torque band clamps.

ENGINE COOLANT OVERFLOW BOTTLE

A remote engine coolant overflow expansion bottle shall be provided in the case of over filling the coolant system. The overflow bottle shall capture the expansion fluid or overflow rather than allow the fluid to drain on the ground.

ENGINE EXHAUST SYSTEM

The exhaust system shall include an end-in end-out horizontally mounted single module after treatment device, and downpipe from the charge air cooled turbo. The single module shall include four temperature sensors, diesel particulate filter (DPF), urea dosing module (UL2), and a selective catalytic reduction (SCR) catalyst to meet current EPA standards. The selective catalytic reduction catalyst utilizes a diesel exhaust fluid solution consisting of urea and purified water to convert NOx into nitrogen, water, and trace amounts of carbon dioxide. The solution shall be mixed and injected into the system through the DPF and SCR.

The system shall utilize 0.07 inch thick stainless steel exhaust tubing between the engine turbo and the DPF. Zero leak clamps seal all system joints between the turbo and DPF.

The single module after treatment through the end of the tailpipe shall be connected with zero leak clamps.

The discharge shall terminate horizontally on the right side of the vehicle ahead of the rear tires.

The exhaust system after treatment module shall be mounted below the frame in the inboard position.

DIESEL EXHAUST FLUID TANK

The exhaust system shall include a molded cross linked polyethylene tank for Diesel Exhaust Fluid (DEF). The tank shall have a capacity of six (6) usable gallons and shall be mounted on the left hand side of the chassis frame behind the batteries below the frame.

Killingworth Volunteer Fire Company

The DEF tank shall be designed with capacity for expansion in case of fluid freezing. Engine coolant, which shall be thermostatically controlled, shall be run through lines in the tank to help prevent the DEF from freezing and to provide a means of thawing the fluid if it should become frozen.

The tank fill tube shall be routed under the rear of the cab with the fill neck and splash guard accessible in the top rear step.

ENGINE EXHAUST ACCESSORIES

An exhaust temperature mitigation device shall be shipped loose for installation by the body manufacturer on the vehicle. The temperature mitigation device shall lower the temperature of the exhaust by combining ambient air with the exhaust gasses at the exhaust outlet.

ENGINE EXHAUST WRAP

The exhaust tubing between the engine turbo and the diesel particulate filter (DPF) shall be wrapped with a thermal cover in order to retain the necessary heat for DPF regeneration. The exhaust wrap shall also help protect surrounding components from radiant heat which can be transferred from the exhaust.

The exhaust flex joint shall not include the thermal exhaust wrap.

TRANSMISSION

The drive train shall include an Allison model EVS 3000 torque converting, automatic transmission which shall include electronic controls. The transmission shall feature two (2) 10-bolt PTO pads located on the converter housing.

The transmission shall include two (2) internal oil filters and Castrol TranSynd™ synthetic TES 295 transmission fluid which shall be utilized in the lubrication of the EVS transmission. An electronic oil level sensor shall be included with the readout located in the shift selector.

The transmission gear ratios shall be:

1st	3.49:1
2nd	1.86:1
3rd	1.41:1
4th	1.00:1
5th	0.75:1
6th	0.65:1 (if applicable) Rev 5.03:1

TRANSMISSION MODE PROGRAMMING

The transmission, upon start-up, will automatically select a four (4) speed operation. The fifth speed over drive shall be available with the activation of the mode button on the shifting pad.

Killingworth Volunteer Fire Company

TRANSMISSION FEATURE PROGRAMMING

The Allison Gen V-E transmission EVS group package number 127 shall contain the 227 vocational package in consideration of the duty of this apparatus for rescue. This package shall incorporate an automatic neutral with selector override. This feature commands the transmission to neutral when the parkbrake is applied, regardless of drive range requested on the shift selector. This requires re-selecting driverange to shift out of neutral for the override.

A transmission interface connector shall be provided in the cab. This package shall contain the followinginput/output circuits to the transmission control module. The Gen V-E transmission shall include prognostic diagnostic capabilities. These capabilities shall include the monitoring of the fluid life, filter change indication, and transmission clutch maintenance.

<u>Function ID</u>	<u>Description</u>	<u>Wire assignment</u>
Inputs		
C	PTO Request	143
F	Aux. Function Range Inhibit (Special)	101/142
Outputs		
G	PTO Enable Output (See Input Function C)	130
S	Neutral Indicator for PTO	145
	Signal Return	103

ELECTRONIC TRANSMISSION OIL LEVEL INDICATOR

The transmission fluid shall be monitored electronically and shall send a signal to activate a warning inthe instrument panel when levels fall below normal.

TRANSMISSION SHIFT SELECTOR

An Allison pressure sensitive range selector touch pad shall be provided and located to the right of the driver within clear view and easy reach. The shift selector shall have a graphical Vacuum Florescent Display (VFD) capable of displaying two lines of text. The shift selector shall provide mode indicationand a prognostic indicator (wrench symbol) on the digital display. The prognostics monitor various operating parameters and shall alert you when a specific maintenance function is required.

TRANSMISSION PRE-SELECT WITH AUXILIARY BRAKE

When the auxiliary brake is engaged, the transmission shall automatically shift to second gear todecrease the rate of speed assisting the secondary braking system and slowing the vehicle.

TRANSMISSION COOLING SYSTEM

The transmission shall include a water to oil cooler system located in the cooling loop between the radiator and the engine. The transmission cooling system shall meet all transmission manufacturer

Killingworth Volunteer Fire Company

requirements. The transmission cooling system shall feature continuous flow of engine bypass water to maintain uninterrupted transmission cooling.

TRANSMISSION DRAIN PLUG

The transmission shall include an original equipment manufacturer installed magnetic transmission fluid drain plug.

TRANSMISSION WARRANTY

The Allison EVS series transmission shall be warranted for a period of five (5) years with unlimited mileage. Parts and labor shall be included in the warranty.

LH PTO

A ten (10) bolt standard duty clutched drive PTO shall be provided by the chassis manufacturer and installed on the transmission. Installation shall include mounting of the PTO and wiring the unit with a control switch.

LH PTO MODEL

A ten (10) bolt Chelsea model 280-GSFJP-B8RK heavy duty transmission driven PTO shall be installed. The clutched shifted PTO is designed specifically for the Allison world transmission and provides an intermittent and continuous torque rating of 265 lb. ft.

PTO LOCATION

The transmission shall have two (2) power take off (PTO) mounting locations, one (1) in the 8:00 o'clock position and one (1) in the 4:00 o'clock position.

LH PTO CONTROL

The left hand power take off shall be controlled by the transmission. The power take off shall be activated by a locking on/off rocker switch with generator legend which contains an integral light which shall illuminate upon a positive engagement of the power take off. This switch shall be located on dash.

Required operating conditions for enabling this function are:

- Throttle position is low
- Engine speed is within customer specified constant limits
- Transmission output speed is within customer specified constant limits

PTO PROGRAMMING

The power take off shall be programmed for operator control such that it shall only engage at or below 900 RPM and operate in a range up to 4000 RPM. The PTO programming shall provide for

Killingworth Volunteer Fire Company

automatic disengagement set at a specified engine speed of 4000 RPM which shall protect equipment driven from the power take off.

DRIVELINE

All drivelines shall be heavy duty metal tube and equipped with Spicer 1710 series universal joints. The shafts shall be dynamically balanced prior to installation to alleviate future vibration. In areas of the driveline where a slip shaft is required, the splined slip joint shall be coated with Glide Coat®.

DRIVELINE GUARDS

One (1) driveline guard loop shall be provided and installed to support the driveline shaft for routine maintenance and in the event of a driveline component failure.

FUEL LINES

The fuel system supply and return lines installed from the fuel tank to the engine shall be black textile braided lines which are reinforced with braided high tensile steel wire. The fuel lines shall be connected with reusable steel fittings.

FUEL SHUTOFF VALVE

A fuel shutoff valve shall be installed in the fuel draw line at the primary fuel filter to allow the fuel filter to be changed without loss of fuel to the fuel pump.

A second fuel shutoff valve shall be installed in the fuel draw line, near the fuel tank to allow maintenance to be performed with minimal loss of fuel.

ELECTRIC FUEL PRIMER

Integral to the engine assembly is an electric lift pump that serves the purpose of pre-filter fuel priming.

FUEL TANK

The fuel tank shall have a capacity of fifty (50) gallons and shall measure 35.00 inches in width X 15.00 inches in height X 24.00 inches in length.

The baffled tank shall have a vent port to facilitate venting to the top of the fill neck for rapid filling without "blow-back" and a roll over ball check vent for temperature related fuel expansion and draw.

The tank is designed with dual draw tubes and sender flanges. The tank shall have 2.00 inch NPT fill ports

for right or left hand fill. A 0.50 inch NPT drain plug shall be centered in the bottom of the tank.

Killingworth Volunteer Fire Company

The fuel tank shall be mounted below the frame, behind the rear axle. Two (2) three-piece strap hanger assemblies with "U" straps bolted midway on the fuel tank front and rear shall be utilized to allow the tank to be easily lowered and removed for service purposes. Rubber isolating pads shall be provided between the tank and the upper tank mounting brackets. Strap mounting studs through the rail, hidden behind the body shall not be acceptable.

FUEL TANK MATERIAL AND FINISH

The fuel tank shall be constructed of 12 gauge stainless steel. The exterior of the tank shall be powder coated black and then painted to match the frame components.

All powder coatings, primers and paint shall be compatible with all metals, pretreatments and primers used. The cross hatch adhesion test per ASTM D3359 Method B, results to be 5B minimum. The pencil hardness test per ASTM D3363 shall have a final post-curved pencil hardness of H-2H. The direct impact resistance test per ASTM D2794, results to be 5B minimum.

Any proposals offering painted fuel tanks with variations from the above process shall not be accepted. The film thickness of vendor supplied parts shall also be sufficient to meet the performance standards as stated above.

FUEL TANK STRAP MATERIAL

The fuel tank straps shall be constructed of #304 stainless steel. The fuel tank straps shall be powdercoated black and then painted to match the frame components if possible.

FUEL TANK FILL PORT

The fuel tank fill ports shall be in-line with the left and right side fill ports located in the forward position of the fuel tank.

FUEL TANK SERVICEABILITY PROVISIONS

The chassis fuel lines shall have additional length provided so the tank can be easily lowered and removed for service purposes. The additional 3.00 feet of length shall be located above the fuel tank and shall be coiled and secured. The fuel line fittings shall be pointed towards the right side (curbside) of the chassis.

FUEL TANK DRAIN PLUG

A 0.5 inch NPT magnetic drain plug shall be centered in the bottom of the fuel tank.

FRONT AXLE

The front axle shall be a Meritor Easy Steer Non drive front axle, model number MFS-20. The axle shall include a 3.74 inch drop and a 71.00 inch king pin intersection (KPI). The axle shall include a conventional style hub with a standard knuckle.

Killingworth Volunteer Fire Company

FRONT AXLE WARRANTY

The front axle shall be warranted by Meritor for five (5) years with unlimited miles under the general service application. Details of the Meritor warranty are provided on the PDF document attached to this option.

FRONT WHEEL BEARING LUBRICATION

The front axle wheel bearings shall be lubricated with oil. The oil level can be visually checked via clear inspection windows in the front axle hubs.

FRONT SHOCK ABSORBERS

Two (2) Bilstein inert, nitrogen gas filled shock absorbers shall be provided and installed as part of the front suspension system. The shocks shall be a monotubular design and fabricated using a special extrusion method, utilizing a single blank of steel without a welded seam, achieving an extremely tight peak-to-valley tolerance and maintains consistent wall thickness. The monotubular design shall provide superior strength while maximizing heat dissipation and shock life.

The ride afforded through the use of a gas shock is more consistent and shall not deteriorate with heat, the same way a conventional oil filled hydraulic shock would.

The Bilstein front shocks shall include a digressive working piston assembly allowing independent tuning of the compression and rebound damping forces to provide optimum ride and comfort without compromise. The working piston design shall feature fewer parts than most conventional twin tube and "road sensing" shock designs and shall contribute to the durability and long life of the Bilstein shock absorbers.

Proposals offering the use of conventional twin tube or "road sensing" designed shocks shall not be considered.

FRONT SUSPENSION

The front suspension shall include a ten (10) leaf spring pack in which the longest leaf measures 54.00 inch long and 4.00 inches wide and shall include a military double wrapped front eye. Both spring eyes shall have a case hardened threaded bushing installed with lubrication counter bore and lubrication land off cross bore with grease fitting. The spring capacity shall be rated at 21,500 pounds.

STEERING COLUMN/ WHEEL

The cab shall include a Douglas Autotech steering column which shall include a seven (7) position tilt, a 2.25 inch telescopic adjustment, and an 18.00 inch, four (4) spoke steering wheel located at the driver's position. The steering wheel shall be covered with black polyurethane foam padding.

The steering column shall contain a horn button, self-canceling turn signal switch, four-way hazard switch and headlamp dimmer switch.

Killingworth Volunteer Fire Company

ELECTRONIC POWER STEERING FLUID LEVEL INDICATOR

The power steering fluid shall be monitored electronically and shall send a signal to activate an audible alarm and visual warning in the instrument panel when fluid level falls below normal.

POWER STEERING PUMP

The hydraulic power steering pump shall be a TRW PS and shall be gear driven from the engine. The pump shall be a balanced, positive displacement, sliding vane type. The power steering system shall include an oil to air passive cooler.

FRONT AXLE CRAMP ANGLE

The chassis shall have a front axle cramp angle of 48-degrees to the left and 44-degrees to the right.

POWER STEERING GEAR

The power steering gear shall be a TRW model TAS 65 with an assist cylinder.

CHASSIS ALIGNMENT

The chassis frame rails shall be measured to insure the length is correct and cross checked to make sure they run parallel and are square to each other. The front and rear axles shall be laser aligned. The front tires and wheels shall be aligned and toe-in set on the front tires by the chassis manufacturer.

REAR AXLE

The rear axle shall be a Meritor model RS-24-160 single drive axle. The axle shall include precision forged, single reduction differential gearing, and shall have a rated capacity of 27,000 pounds.

The axle shall be built of superior construction and quality components to provide the rugged dependability needed to stand up to the fire industry's demands. The axle shall include rectangular shaped, hot-formed housing with a standard wall thickness of 0.50 of an inch for extra strength and rigidity and a rigid differential case for high axle strength and reduced maintenance.

The axle shall have heavy-duty Hypoid gearing for longer life, greater strength and quieter operation. Industry-standard wheel ends for compatibility with both disc and drum brakes, and unitized oil seal technology to keep lubricant in and help prevent contaminant damage will be used.

REAR AXLE DIFFERENTIAL LUBRICATION

The rear axle differential shall be lubricated with oil.

REAR AXLE WARRANTY

Killingworth Volunteer Fire Company

The rear axle shall be warranted by Meritor for five (5) years with unlimited miles under the general service application. Details of the Meritor warranty are provided on the PDF document attached to this option.

REAR WHEEL BEARING LUBRICATION

The rear axle wheel bearings shall be lubricated with oil.

REAR AXLE DIFFERENTIAL CONTROL

A driver controlled differential lock shall be installed on the rear axle. This feature shall allow the main differential to be locked and unlocked when encountering poor road or highway conditions, where maximum traction is needed, for use at speeds no greater than 25 MPH. The differential lock shall be controlled by a locking rocker switch on the switch panel. The light on the switch shall illuminate with positive engagement of the differential control.

VEHICLE TOP SPEED

The top speed of the vehicle shall be approximately 65 MPH +/- 2 MPH at governed engine RPM.

REAR SUSPENSION

The single rear axle shall feature a Hendrickson Firemaax™ air suspension. The suspension shall include two optimized air springs mounted to cast structural trailing arms, a transverse cross beam for increased roll stability and two heavy duty shock absorbers. Dual air height control valves shall be installed to ensure equal frame height on both sides of the vehicle regardless of the load. Axle alignment is maintained using two eccentric bushings at each frame bracket.

The rear suspension capacity shall be rated at 27,000 pounds.

REAR SHOCK ABSORBERS

Shock absorbers shall be supplied by the suspension manufacturer and installed on the rear axle suspension.

TIRE INTERMITTENT SERVICE RATING

The chassis shall be rated using the stamped rating on the side of the tire as the basis for determining the maximum vehicle load and speed.

FRONT TIRE

The front tires shall be Goodyear 425/65R-22.5 20PR "L" tubeless radial G296 MSA mixed service tread.

The front tire stamped load capacity shall be 22,800 pounds per axle with a nominal speed rating of 68 miles per hour when properly inflated to 120 pounds per square inch.

Killingworth Volunteer Fire Company

The Goodyear Intermittent Service Rating maximum load capacity shall be 24,400 pounds per axle with a speed rating of 68 miles per hour when properly inflated to 120 pounds per square inch.

The Goodyear Intermittent Service Rating maximum speed capacity shall be 22,800 pounds per axle with a speed rating of 75 miles per hour when properly inflated to 120 pounds per square inch.

The Goodyear Intermittent Service Rating limits the operation of the emergency vehicle to no more than fifty (50) miles of continuous operation under maximum recommended payload, or without stopping for at least twenty (20) minutes. The emergency vehicle must reduce its speed to no more than 50 MPH after the first fifty (50) miles of travel.

REAR TIRE

The rear tires shall be Goodyear 12R-22.5 16PR "H" tubeless radial G751 MSA mixed service tread.

The rear tire stamped load capacity shall be 27,120 pounds per axle with a speed rating of 68 miles per hour when properly inflated to 120 pounds per square inch.

The Goodyear Intermittent Service Rating maximum load capacity shall match the stamped rating.

The Goodyear Intermittent Service Rating maximum speed capacity shall be 27,120 pounds per axle with a speed rating of 75 miles per hour when properly inflated to 120 pounds per square inch.

The Goodyear Intermittent Service Rating limits the operation of the emergency vehicle to no more than fifty (50) miles of continuous operation under maximum recommended payload, or without stopping for at least twenty (20) minutes. The emergency vehicle must reduce its speed to no more than 50 MPH after the first fifty (50) miles of travel.

REAR AXLE RATIO

The rear axle ratio shall be 5.63:1.

TIRE PRESSURE INDICATOR

There shall be electronic chrome LED valve caps shipped loose for installation by the OEM which shall illuminate with a red LED when tire pressure drops 8psi provided. The valve caps are self-calibrating and set to the pressure of the tire upon installation.

FRONT WHEEL

The front wheels shall be Alcoa hub piloted, 22.50 inch X 12.25 inch LvL One™ polished aluminum wheels. The hub piloted mounting system shall provide easy installation and shall include two-piece flange nuts. The wheels shall feature one-piece forged strength and shall include Alcoa's Dura-Bright® finish as an integral part of the wheel surface. Alcoa Dura-Bright® wheels keep their shine without polishing. Brake dust, grime and road debris are easily removed

Killingworth Volunteer Fire Company

by simply cleaning the wheels with soap and water.

REAR WHEEL

The rear wheels shall be Alcoa hub piloted, 22.50 inch X 8.25 inch LvL One™ aluminum wheels with apolished outer surface and Alcoa Dura-Bright® wheel treatment as an integral part of the wheel. The hub piloted mounting system shall provide easy installation and shall include two-piece flange nuts.

BALANCE WHEELS AND TIRES

All of the wheels and tires, including any spare wheels and tire assemblies, shall be dynamicallybalanced.

WHEEL TRIM

The front wheels shall include stainless steel lug nut covers and stainless steel baby moons shipped loosewith the chassis for installation by the apparatus builder. The baby moons shall have cutouts for oil seal viewing when applicable.

The rear wheels shall include stainless steel lug nut covers and band mounted spring clip stainless steel high hats shipped loose with the chassis for installation by the apparatus builder.

The lug nut covers, baby moons, and high hats shall be RealWheels® brand constructed of 304L grade,non-corrosive stainless steel with a mirror finish. Each wheel trim component shall meet D.O.T. certification.

WHEEL GUARDS

The rear dual wheels shall include a plastic isolator approximately 0.04” thick installed between theinner and outer wheel to help prevent corrosion caused by metal to metal contact.

TIRE CHAINS

Onspot brand six (6) strand automatic ice chains shall be installed on the rear axle of the chassis toprovide instant traction while traveling on ice and snow at speeds below 35 MPH.

TIRE CHAINS ACTIVATION

The tire chain system shall be activated by a locking switch on the dash to deter accidental activation.The light on the switch shall illuminate when the tire chains are engaged. The tire chains shall be interlocked with the transmission and shall engage only if the vehicle is traveling 30 MPH or less.

After traveling over 30 MPH, the vehicle must be reduced to a speed below 5 MPH for the tire chains tobe engaged or re-engaged.

Killingworth Volunteer Fire Company

BRAKE SYSTEM

A rapid build-up air brake system shall be provided. The air brakes shall include, at a minimum, a two

(2) air tank, three (3) reservoir system with a total of 4152 cubic inch of air capacity. A floor mounted treadle valve shall be mounted inside the cab for graduated control of applying and releasing the brakes. An inversion valve shall be installed to provide a service brake application in the unlikely event of primary air supply loss. All air reservoirs provided on the chassis shall be labeled for identification.

The rear axle spring brakes shall automatically apply in any situation when the air pressure falls below 25PSI and shall include a mechanical means for releasing the spring brakes when necessary. An audible alarm shall designate when the system air pressure is below 60 PSI.

A four (4) sensor, four (4) modulator anti-lock braking system (ABS) shall be installed on the front and rear axles in order to prevent the brakes from locking or skidding while braking during hard stops or on icy or wet surfaces. This in turn shall allow the driver to maintain steering control under heavy braking and in most instances, shorten the braking distance. The electronic monitoring system shall incorporate diagonal circuitry which shall monitor wheel speed during braking through a sensor and tone ring on each wheel. A dash mounted ABS lamp shall be provided to notify the driver of a system malfunction. The ABS system shall automatically disengage the auxiliary braking system device when required. The speedometer screen shall be capable of reporting all active defaults using PID/SID and FMI standards.

Additional safety shall be accommodated through Automatic Traction Control (ATC) which shall be installed on the single rear axle. The ATC system shall apply the ABS when the drive wheels loose traction. The system shall scale the electronic engine throttle back to prevent wheel spin while accelerating on ice or wet surfaces.

A momentary rocker style switch shall be provided and properly labeled "mud/snow". When the switch is pressed once, the system shall allow a momentary wheel slip to obtain traction under extreme mud and snow conditions. During this condition the ATC light and the light on the rocker switch shall blink continuously notifying the driver of activation. Pressing the switch again shall deactivate the mud/snow feature.

The Electronic Stability Control (ESC) unit is a functional extension of the electronic braking system. It is able to detect any skidding of the vehicle about its vertical axis as well as any rollover tendency. The control unit comprises an angular-speed sensor that measures the vehicle's motion about the vertical axis, caused, for instance, by cornering or by skidding on a slippery road surface. An acceleration sensor measures the vehicle's lateral acceleration. The Controller Area Network (CAN) bus provides information on the steering angle. On the basis of lateral acceleration and steering angle, an integrated microcontroller calculates a theoretical angular speed for the stable vehicle condition.

FRONT BRAKES

The front brakes shall be Meritor EX225 Disc Plus disc brakes with 17.00 inch vented rotors.

Killingworth Volunteer Fire Company

REAR BRAKES

The rear brakes shall be Meritor 16.50 inch X 7.00 inch S-cam drum type.

PARK BRAKE

Upon application of the push-pull valve in the cab, the rear brakes will engage via mechanical springforce. This is accomplished by dual chamber rear brakes, satisfying the FMVSS parking brake requirements.

PARK BRAKE CONTROL

A Meritor-Wabco manual hand control push-pull style valve shall operate the parking brake.

The parking brake actuation valve shall be mounted to the left side of the engine tunnel integrated into the transmission shift pod console within easy access of the driver.

A separate Meritor-Wabco manual hand control push style valve shall be added to lock the front axle and deactivate when the main parking brake is released.

REAR BRAKE SLACK ADJUSTERS

The rear brakes shall include Meritor automatic slack adjusters installed on the axle which features a simple, durable design offering reduced weight. The automatic slack adjusters shall feature a manual adjusting nut which cannot inadvertently be backed off and threaded grease fittings for easy serviceability.

REAR BRAKE DUST SHIELDS

The rear brakes shall be equipped with brake dust shields.

FRONT BRAKE CHAMBERS

The front brakes shall be provided with MGM type 24 long stroke brake chambers.

REAR BRAKE CHAMBERS

The rear axle shall include TSE 30/36 brake chambers which shall convert the energy of compressed air into mechanical force and motion. This shall actuate the brake camshaft, which in turn shall operate the foundational brake mechanism forcing the brake shoes against the brake drum. The TSE Type 36 brake chamber has a 36.00 square inch effective area.

AIR COMPRESSOR

The air compressor provided for the engine shall be a Wabco® SS318 single cylinder pass-through drive type compressor which shall be capable of producing 18.7 CFM at 1200 engine RPMs. The air compressor shall feature a higher delivery efficiency translating to more air delivery per horsepower absorbed. The compressor shall include an aluminum cylinder head which shall improve cooling, reduce weight and decrease carbon formation. Superior piston and bore finishing

Killingworth Volunteer Fire Company

technology shall reduce oil consumption and significantly increasing the system component life.

AIR GOVERNOR

An air governor shall be provided to control the cut-in and cut-out pressures of the engine mounted air compressor. The governor shall be calibrated to meet FMVSS requirements. The air governor shall be located on the air dryer bracket.

MOISTURE EJECTORS

An automatic moisture ejector with a manual drain provision shall be installed on the wet tank of the air supply system. Manual pet-cock type drain valves shall be installed on all remaining reservoirs of the air supply system.

AIR TANK SPACERS

There shall be spacers included with the air tank mounting. The spacers shall move the air tanks 1.50 inches inward towards the center of the chassis. This shall provide clearance between the air tanks and the frame for body U-bolt clearance.

REAR AIR TANK MOUNTING

If a combination of wheel base, air tank quantity, or other requirements necessitate the location of one or more air tanks to be mounted rear of the fuel tank, these tank(s) will be mounted perpendicular to frame.

WHEELBASE

The chassis wheelbase shall not exceed 174.00 inches.

REAR OVERHANG

The chassis rear overhang shall be 50.00 inches.

FRAME

The frame shall consist of single rails running parallel to each other with cross members forming a ladder style frame. The frame rails shall be formed in the shape of a "C" channel, 10.25 inch web X 3.50 inches deep upper and lower flanges X 0.38 inches thick. Each rail shall be constructed of 110,000 psi minimum yield high strength low alloy steel. Each single rail shall be rated by a Resistance Bending Moment (RBM) minimum of 1,830,400 inch pounds and have a minimum section modulus of 16.64 cubic inches calculated by the radius method. The outside dimension frame shall measure 34.25 inches in width.

Proposals calculating the frame strength using the "box method" shall not be considered.

Killingworth Volunteer Fire Company

Proposals including heat treated rails shall not be considered. Heat treating frame rails produces rails that are not uniform in their mechanical properties throughout the length of the rail. Rails made of high strength, low alloy steel are already at the required yield strength prior to forming the rail.

A minimum of seven (7) fully gusseted 0.25 inch thick cross members shall be installed. The inclusion of the body mounting, or bumper mounting shall not be considered as a cross member. The cross members shall be attached using zinc coated grade 8 fasteners. The bolt heads shall be flanged type, held in place by distorted thread flanged lock nuts. Each cross member shall be mounted to the frame rails utilizing a minimum of 0.25 inch thick gusset reinforcement plates at all corners balancing the area of force throughout the entire frame.

Any proposals not including additional reinforcement for each cross member shall not be considered.

All relief areas shall be cut in with a minimum 2.00 inch radius at intersection points with the edges ground to a smooth finish to prevent a stress concentration point.

FRAME WARRANTY

Summary of Warranty Terms:

THE FOLLOWING IS SUMMARY OF WARRANTY TERMS FOR INFORMATION ONLY. THE ACTUAL LIMITED WARRANTY TERMS CAN BE FOUND IN THE CHASSIS WARRANTY DOCUMENT, WHICH CONTAINS THE COMPLETE STATEMENT OF THE WARRANTY. SPARTAN'S RESPONSIBILITY IS TO BE ACCORDING TO THE TERMS OF THE COMPLETE LIMITED WARRANTY DOCUMENT.

The frame and cross members shall carry a limited lifetime warranty to the original purchaser. The warranty period shall commence on the date the vehicle is delivered to the first end user.

FRAME PAINT

The frame shall be powder coated black prior to any attachment of components.

All powder coatings, primers and paint shall be compatible with all metals, pretreatments and primers used. The cross hatch adhesion test per ASTM D3359 shall not have a fail of more than ten (10) squares. The pencil hardness test per ASTM D3363 shall have a final post-curved pencil hardness of H-2H. The direct impact resistance test per ASTM D2794 shall have an impact resistance of 120.00 inches per pound at 2 mils.

Any proposals offering painted frame with variations from the above process shall not be accepted. The film thickness of vendor supplied parts shall also be sufficient to meet the performance standards as stated above.

FRONT BUMPER

The chassis shall be equipped with a severe duty front bumper constructed from structural steel channel. The bumper material shall be 0.38 thick ASTM A36 steel which shall measure 12.00

Killingworth Volunteer Fire Company

inches high with a 3.05 inch flange and shall be 99.00 inches wide with angled front corners. The front bumper shall be as short as possible to accommodate winch.

The bumper shall be primed and painted as specified.

FRONT BUMPER EXTENSION LENGTH

The front bumper shall be extended approximately 18.00 inches ahead of the cab.

FRONT BUMPER PAINT

The front bumper shall be painted the same as the lower cab color with chevron to match the current engine 855.

FRONT BUMPER WINCH

A Ramsey 15k hydraulic winch will be installed in the center of the front bumper with 120 feet of ½ inch cable, clevis hook and fairlead. The winch shall be operated by hydraulic controls as well a hand pendant. It shall feature an easy to use free spooling clutch. The winch will be run off of the truck transmission port and have a separate switch inside the cab to engage and disengage. The winch will be able to be operated with the parking brake off.

FRONT BUMPER APRON

The front bumper shall be as short as possible to accommodate the front winch.

The apron shall be installed between the bumper and the front face of the cab affixed using stainlesssteel bolts attaching the apron to the top bumper flange.

FRONT BUMPER COMPARTMENT CENTER

The bumper apron shall include access provisions for a center mounted winch. The apron shall include an access cover constructed of 0.19 inch thick bright embossed aluminum tread plate to help protect the winch from water, dirt or debris.

FRONT BUMPER COMPARTMENT COVER HARDWARE

The front bumper compartment cover(s) shall include gas cylinder stays which shall hold the cover open. Each cover shall be held in the closed position via a D-ring style latch.

MECHANICAL SIREN

The front bumper shall include an electro mechanical Federal Q2B™ siren, which shall be streamlined, chrome-plated and shall produce 123 decibels of sound at 10.00 feet. The Q2B™ siren produces a distinctive warning sound that is recognizable at long distances. A unique clutch design provides a longer coast down sound while reducing the amp draw to 100 amps. The siren shall measure 10.50 inches wide X 10.00 inches high X 14.00 inches deep. The siren shall

Killingworth Volunteer Fire Company

include mounting hardware designed to be recess and flush mounted.

MECHANICAL SIREN LOCATION

The siren shall be recessed and flush mounted on the left side in the front fascia of the bumper approximately in the center of the flat surface between the bumper radius and the frame rail.

AIR HORN

The chassis shall include two (2) Grover brand Stutter Tone air horns which shall measure 21.00 inches long with a 6.00 inch round flare. The air horns shall be trumpet style with a chrome finish.

AIR HORN LOCATION

The air horns shall be mounted in the bumper, one (1) on the right side of the bumper in the inboard position relative to the right hand frame rail and one (1) on the left side of the bumper in the inboard position relative to the left hand frame rail.

AIR HORN RESERVOIR

One (1) air reservoir, with a 1200 cubic inch capacity, shall be installed on the chassis to act as a supply tank for operating air horns. The reservoir shall be isolated with a 90 PSI pressure protection valve on the reservoir supply side to prevent depletion of the air to the air brake system.

ELECTRONIC SIREN SPEAKER

There shall be one (1) Cast Products Inc. model SA4301, 100 watt speaker provided. The speaker shall measure 6.20 inches tall X 7.36 inches wide X 3.06 inches deep. The speaker shall include a flat mounting flange which shall be polished aluminum. Siren speaker shall be mounted in the front bumper.

ELECTRONIC SIREN SPEAKER LOCATION

The electronic siren speaker shall be located on the front bumper face on the right side outboard of the frame rail in the far outboard position.

FRONT BUMPER TOW EYES

The bumper shall include two (2) painted tow eyes shall be installed through the front bumper. The tow eyes shall be fabricated from 0.75 inch thick #1020 ASTM-36 hot rolled steel. The inside diameter of the tow eye shall be 3.00 inch and have inside/outside chamfered edges. The tow eyes shall be painted to match the frame components.

CAB TILT SYSTEM

The entire cab shall be capable of tilting approximately 45-degrees to allow for easy maintenance of

Killingworth Volunteer Fire Company

the engine and transmission. The cab tilt pump assembly shall be located on the right side of the chassis above the battery box.

The electric-over-hydraulic lift system shall include an ignition interlock and red cab lock down indicator lamp on the tilt control which shall illuminate when holding the "Down" button to indicate safe road operation.

It shall be necessary to activate the master battery switch and set the parking brake in order to tilt the cab. As a third precaution the ignition switch must be turned off to complete the cab tilt interlock safety circuit.

Two (2) spring-loaded hydraulic hold down hooks located outboard of the frame shall be installed to hold the cab securely to the frame. Once the hold-down hooks are set in place, it shall take the application of pressure from the hydraulic cab tilt lift pump to release the hooks.

Two (2) cab tilt cylinders shall be provided with velocity fuses in each cylinder port. The cab tilt pivots shall be 1.90 inch ball and be anchored to frame brackets with 1.25 inch diameter studs.

A steel safety channel assembly, painted safety yellow shall be installed on the right side cab lift cylinder to prevent accidental cab lowering. The safety channel assembly shall fall over the lift cylinder when the cab is in the fully tilted position. A cable release system shall also be provided to retract the safety channel assembly from the lift cylinder to allow the lowering of the cab.

CAB TILT LIMIT SWITCH

A cab tilt limit switch shall be installed. The switch will effectively limit the travel of the cab when being tilted. The limit adjustment of the switch shall be preset by the chassis manufacturer to prevent damage to the cab or any bumper mounted option mounted in the cab tilt arc. Further adjustment to the limit by the apparatus manufacturer shall be available to accommodate additional equipment.

CAB TILT CONTROL RECEPTACLE

A six (6) pin Deutsch receptacle that includes a cap shall be installed in the officers side front door kick plate to provide a place to plug in the cab tilt remote control pendant.

The remote control pendant shall include 20.00 feet of cable with a mating Deutsch connector. The remote control pendant shall be shipped loose with the chassis.

CAB TILT LOCK DOWN INDICATOR

The cab dash shall include a message located within the dual air pressure gauge which shall alert the driver when the cab is unlocked and ajar. The alert message shall cease to be displayed when the cab is in the fully lowered position and the hold down hooks are secured and locked to the cab mounts.

In addition to the alert message an audible alarm shall sound when the cab is unlocked and ajar with the parking brake released.

Killingworth Volunteer Fire Company

CAB WINDSHIELD

The cab windshield shall have a surface area of 2825.00 square inches and be of a two (2) piecewraparound design for maximum visibility.

The glass utilized for the windshield shall include standard automotive tint. The left and right windshield shall be fully interchangeable thereby minimizing stocking and replacement costs.

Each windshield shall be installed using black self locking window rubber.

GLASS FRONT DOOR

The front cab doors shall include a window which is 27.00 inches in width X 26.00 inches in height. These windows shall have the capability to roll down completely into the door housing. This shall be accomplished using electric actuation. The left and right front door windows shall be controlled using a switch on each respective side inner door panel. The driver's door shall include a switch for each powered door window in the cab.

There shall be an irregular shaped fixed window which shall measure 2.50 inches wide at the top, 8.00 inches wide at the bottom X 26.00 inches in height, more commonly known as "cozy glass" ahead of the front door roll down windows.

The windows shall be mounted within the frame of the front doors trimmed with a black anodized ring on the exterior.

GLASS TINT FRONT DOOR

The windows located in the left and right front doors shall have a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

GLASS REAR DOOR RH

The rear right hand side crew door shall include a window which is 27.00 inches in width X 26.00 inches in height. The window shall be a powered type and shall be controlled by a switch on the door panel ledge and on the driver's control panel.

GLASS TINT REAR DOOR RIGHT HAND

The window located in the right hand side rear door shall include a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

GLASS REAR DOOR LH

The rear left hand side crew door shall include a window which is 27.00 inches in width X 26.00 inches in height. The window shall be a powered type and shall be controlled by a switch on the door panel ledge and on the driver's control panel.

Killingworth Volunteer Fire Company

GLASS TINT REAR DOOR LEFT HAND

The window located in the left hand side rear door shall include a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

GLASS SIDE MID RH

The cab shall include a window on the right side behind the front and ahead of the crew door which shall measure 16.00 inches wide X 26.00 inches high. This window shall be fixed within this space and shall be rectangular in shape. The window shall be mounted using self locking window rubber. The glass utilized for this window shall include a green automotive tint unless otherwise noted.

GLASS TINT SIDE MID RIGHT HAND

The window located on the right hand side of the cab between the front and rear doors shall include a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

GLASS SIDE MID LH

The cab shall include a window on the left side behind the front door and ahead of the crew door and above the wheel well which shall measure 16.00 inches wide X 26.00 inches high. This window shall be fixed within this space and shall be rectangular in shape. The window shall be mounted using self locking window rubber. The glass utilized for this window shall include a green automotive tint unless otherwise noted.

GLASS TINT SIDE MID LEFT HAND

The window located on the left hand side of the cab between the front and rear doors shall include a standard green automotive tint which shall allow seventy-five percent (75%) light transmittance.

CLIMATE CONTROL

The cab shall include a 57,500 BTU @ 425 CFM front overhead heater/defroster which shall be provided and installed above the windshield between the sun visors.

The cab shall also include a combination heater air-conditioning unit mounted on the engine tunnel. This unit shall offer eight (8) adjustable louvers, four (4) forward facing and four (4) rearward facing, a temperature control valve and two (2) blowers offering three (3) speeds which shall be capable of circulating 550 cubic feet of air per minute. The unit shall be rated for 42,500 BTU/Hr of cooling and 36,000 BTU/Hr of heating.

All defrost/heating systems shall be plumbed with one (1) seasonal shut-off valve at the front corner on the right side of the cab.

The air conditioner lines shall be a mixture of custom bend zinc coated steel fittings and

Killingworth Volunteer Fire Company

Aeroquipflexible hose with Aeroquip EZ clip fittings.

CLIMATE CONTROL DRAIN

The climate control system shall include a gravity drain for water management. The gravity drain shall remove condensation from the air conditioning system without additional mechanical assistance.

CLIMATE CONTROL ACTIVATION

The heating and defrosting controls shall be located on the front overhead climate control unit. There shall be additional heating and air conditioning controls located on the engine tunnel mounted climate control unit.

HEATER HOSE INSULATION

The heater hoses leading from the engine to the cab shall include a foam insulation wrap which runs the length of the hose improving heating in extreme cold climates. The heater hoses which shall be routed inside the cab shall not be insulated.

A/C CONDENSER LOCATION

A roof mounted A/C condenser shall be installed on the center of the cab, mid-roof.

A/C COMPRESSOR

The air-conditioning compressor shall be a belt driven, engine mounted, open type compressor that shall be capable of producing a minimum of 32,000 BTU at 1500 engine RPMs. The compressor shall utilize R-134A refrigerant and PAG oil.

UNDER CAB INSULATION

The underside of the cab tunnel surrounding the engine shall be lined with multi-layer insulation, engineered for application inside diesel engine compartments.

The insulation shall act as a noise barrier, absorbing noise thus keeping the decibel level in the cab well within NFPA recommendations. As an additional benefit, the insulation shall assist in sustaining the desired temperature within the cab interior.

The engine tunnel insulation shall measure approximately 0.30 inch thick including a multi-layer foil faced glass cloth and polyester fiber layer. The foil surface acts as protection against heat, moisture and other contaminants. The insulation shall meet or exceed FMVSS 302 flammability test.

The cab floor insulation shall measure .56 inch thick including a 1.0#/sf PVC barrier and a moisture and heat reflective foil facing, reinforced with fiberglass strands. The foil surface acts as protection against moisture and other contaminants. The insulation shall meet or exceed FMVSS 302 flammability test.

Killingworth Volunteer Fire Company

The insulation shall be cut precisely to fit each section and sealed for additional heat and sound deflection. The insulation shall be held in place by acrylic pressure sensitive adhesive. In addition, the insulation on the underside of the cab floor shall have aluminum pins with hard hat, hold in place fastening heads with an expanded metal overlay to assist in retaining the insulation tight against the cab.

INTERIOR TRIM FLOOR

The floor of the cab shall be covered with a multi-layer mat consisting of 0.25 inch thick sound absorbing closed cell foam with a 0.06 inch thick non-slip vinyl surface with a pebble grain finish. The covering shall be held in place by a pressure sensitive adhesive and aluminum trim molding. All exposed seams shall be sealed with silicone caulk matching the color of the floor mat to reduce the chance of moisture and debris retention.

INTERIOR TRIM

The cab interior shall include trim on the front ceiling, rear crew ceiling, and the cab walls. It shall be easily removable to assist in maintenance. The trim shall be constructed of insulated vinyl over a hardboard backing.

REAR WALL INTERIOR TRIM

The rear wall of the cab shall be trimmed with vinyl.

HEADER TRIM

The cab interior shall feature header trim over the driver and officer dash constructed of 5052-H32 Marine Grade, 0.13 inch thick aluminum.

TRIM LH DASH

The left hand dash shall be constructed of 5052-H32 Marine Grade, 0.13 inch thick aluminum plate for a perfect fit around the instrument panel. For increased occupant protection the extreme duty left hand dash utilizes patent pending break away technology to reduce rigidity in the event of a frontal crash. The left hand dash shall offer lower vertical surface area to the left and right of the steering column to accommodate control panels.

TRIM RH DASH

The right hand dash shall be constructed of 5052-H32 Marine Grade, 0.13 of an inch thick aluminum plate and shall include a glove compartment with a hinged door and a Mobile Data Terminal (MDT) provision. The glove compartment size will measure 14.00 inches wide X 6.38 inches high X 5.88 inches deep. The MDT provision shall be provided above the glove compartment.

ENGINE TUNNEL TRIM

Killingworth Volunteer Fire Company

The cab engine tunnel shall be covered with a multi-layer mat consisting of 0.25 inch closed cell foam with a 0.06 inch thick non-slip vinyl surface with a pebble grain finish. The mat shall be held in place by pressure sensitive adhesive. The engine tunnel mat shall be trimmed with anodized aluminum stair nosing trim for an aesthetically pleasing appearance.

POWER POINT DASH MOUNT

The cab shall include two (2) 12 volt cigarette lighter type receptacles in the switch panel to provide a power source for 12 volt electrical equipment. The cab shall also include two (2) Blue Sea dual universal serial bus (USB) charging receptacle in the cab dash to provide a power source for USB chargeable electrical equipment. The USB port shall be capable of a 5 Volt-2.1 amp total output. The receptacles shall be wired battery direct.

STEP TRIM

Each cab entry door shall include a three step entry. The first step closest to the ground shall be constructed of polished 5032 H32 aluminum Grip Strut® grating with angled outer corners. The step shall feature a splash guard to reduce water and debris from splashing in to the step. The splash guard shall have an opening on the outer edge to allow debris and water to flow through rather than becoming trapped within the stepping surface. The lower step shall be mounted to a frame which is integral with the construction of the cab for rigidity and strength. The middle step shall be integral with the cab construction and shall be trimmed with a Flex-Tred® adhesive grit surface material.

UNDER CAB ACCESS DOOR

The cab shall include an aluminum access door in the left crew step riser painted to match the cab interior paint with a push and turn latch. The under cab access door shall provide access to the diesel exhaust fluid fill.

INTERIOR DOOR TRIM

The interior trim on the doors of the cab shall consist of an aluminum panel constructed of Marine Grade 5052-H32 0.13 of an inch thick aluminum plate. The door panels shall include a painted finish.

DOOR TRIM CUSTOMER NAMEPLATE

The interior door trim on the front doors shall include a customer nameplate which states the vehicle was custom built for Killingworth Volunteer Fire Company.

CAB DOOR TRIM REFLECTIVE

The interior of each door shall include high visibility reflective tape. A white reflective tape shall be provided vertically along the rear outer edge of the door. The lowest portion of each door skin shall include a reflective tape chevron with red and white stripes and a Spartan logo. The chevron tape shall measure 6.00 inches in height.

Killingworth Volunteer Fire Company

INTERIOR GRAB HANDLE "A" PILLAR

There shall be two (2) rubber covered 11.00 inch grab handles installed inside the cab, one on each "A" post at the left and right door openings. The left handle shall be located 7.88 inches above the bottom of the door window opening and the right handle shall be located 2.88 inches above the bottom of the door window opening. The handles shall assist personnel in entering and exiting the cab.

INTERIOR GRAB HANDLE FRONT DOOR

Each front door shall include one (1) ergonomically contoured 9.00 inch cast aluminum handle mounted horizontally on the interior door panels. The handles shall feature a textured black powder coat finish to assist personnel entering and exiting the cab.

INTERIOR GRAB HANDLE REAR DOOR

A black powder coated cast aluminum assist handle shall be provided on the inside of each rear crew door. A 30.00 inch long handle shall extend horizontally the width of the window just above the windowsill. The handle shall assist personnel in exiting and entering the cab.

ADDITIONAL INTERIOR GRAB HANDLE REAR DOOR

Each interior rear door shall include an additional grab handle. The handle shall be an ergonomically contoured 9.00 inch long cast aluminum grab handle. Each handle shall be mounted horizontally on the upper interior door trim panel. Each handle shall be textured and feature a black powder coat finish and shall assist personnel entering and exiting the cab.

INTERIOR SOFT TRIM COLOR

The cab interior soft trim surfaces shall be black in color.

INTERIOR TRIM SUNVISOR

The header shall include two (2) sun visors, one each side forward of the driver and officer seating positions above the windshield. Each sun visor shall be constructed of Masonite and covered with padded vinyl trim.

INTERIOR FLOOR MAT COLOR

The cab interior floor mat shall be black in color.

CAB PAINT INTERIOR DOOR TRIM

The inner door panel surfaces shall be painted with multi-tone black/black texture finish.

HEADER TRIM INTERIOR PAINT

Killingworth Volunteer Fire Company

The metal surfaces in the header area shall be coated with multi-tone black-black texture finish.

TRIM CENTER DASH INTERIOR PAINT

The entire center dash shall be coated with multi-tone black-black texture finish. Any accessory pods attached to the dash shall also be painted this color.

TRIM LH DASH INTERIOR PAINT

The left hand dash shall be painted with a multi-tone black-black texture finish.

TRIM RIGHT HAND DASH INTERIOR PAINT

The right hand dash shall be painted with multi-tone black-black texture finish.

DASH PANEL GROUP

The main center dash area shall include three (3) removable panels located one (1) to the right of the driver position, one (1) in the center of the dash and one (1) to the left of the officer position. The center panel shall be within comfortable reach of both the driver and officer.

SWITCHES CENTER PANEL

The center dash panel shall include twelve (12) rocker switch positions in a single row across the top of the panel.

Switched will be laid out at preconstruction.

A rocker switch with a blank legend installed directly above shall be provided for any position without a switch and legend designated by a specific option. The non-specified switches shall be two-position, black switches with a green indicator light. Each blank switch legend can be custom engraved by the body manufacturer. All switch legends shall have backlighting provided.

SWITCHES LEFT PANEL

The left dash panel shall include eight (8) switches in a single row configuration. Five (5) of the switches shall be rocker type and the left three (3) shall be the headlight switch, the instrument lamp dimmer switch and the windshield wiper/washer control switch.

A rocker switch with a blank legend installed directly above shall be provided for any position not designated by a specific option. The non-designated switches shall be two-position, black switches with a green indicator light. Each blank switch legend can be custom engraved by the body manufacturer. All switch legends shall have backlighting provided.

Switched will be laid out at preconstruction.

Killingworth Volunteer Fire Company

SWITCHES RIGHT PANEL

The right dash panel shall include 12 volt DC lighting switches. It will also include push buttons for the mechanical siren and air horns.

SEAT BELT WARNING

A Weldon seat belt warning system, integrated with the Vehicle Data Recorder system, shall be installed for each seat within the cab. The system shall activate a digital seat position indicator with a seat position legend and integrated audible alarm in the switch panel.

The warning system shall activate when any seat is occupied with a minimum of 60 pounds and the corresponding seat belt remains unfastened. The warning system shall also activate when any seat is occupied and the corresponding seat belt was fastened in an incorrect sequence. Once activated, the visual indicators and applicable audible alarm shall remain active until all occupied seats have the seatbelts fastened.

SEAT MATERIAL

The Bostrom Firefighter seats shall include a covering of extra high strength, wear resistant fabric made of durable low seam Durawear Plus™ ballistic polyester. A PVC coating shall be bonded to the back side of the material to help protect the seats from UV rays and from being saturated or contaminated by fluids. Durawear Plus™ meets or exceeds specification of the common trade name Imperial 1800. The material meets FMVSS 302 flammability requirements.

If applicable, Theatre style seats located in the cab shall be high strength, wear resistant fabric made of durable ballistic polyester. A PVC coating shall be bonded to the back side of the material to help protect the seats from UV rays and from being saturated or contaminated by fluids. Common trade names for this material are Imperial 1200 and Durawear.

SEAT COLOR

All seats supplied with the chassis shall be gray in color. All seats shall include red seat belts.

SEAT BACK LOGO

The seat back shall include the “Spartan” logo. The logo shall be centered on the standard headrest of the seat back and on the left side of a split headrest.

SEAT DRIVER

The driver's seat shall be an H.O. Bostrom 400 Series Firefighter Sierra model seat. The seat shall feature eight-way electric positioning. The eight positions shall include up and down, fore and aft with 8.00 inches of travel, back angle adjustment and seat rake adjustment. The seat shall feature integral springs to isolate shock.

The seat shall feature an all belts to seat (ABTS) style of safety restraint. The ABTS feature shall include a three-point shoulder harness with the lap belt, automatic retractor and buckle as an integral part of the seat assembly.

Killingworth Volunteer Fire Company

The minimum vertical dimension from the seat H-point to the ceiling for this belted seating position shall be 35.00 inches measured with the seat height adjusted to the lowest position of travel.

This model of seat shall have successfully completed the static load tests set forth by FMVSS 207, 209, and 210 in effect at the time of manufacture. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity.

The materials used in construction of the seat shall also have successfully completed testing with regard to the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which dictates the allowable burning rate of materials in the occupant compartments of motor vehicles.

SEAT BACK DRIVER

The driver's seat shall include a standard seat back incorporating the all belts to seat feature (ABTS). The seat back shall feature a contoured head rest.

SEAT MOUNTING DRIVER

The driver's seat shall be installed in an ergonomic position in relation to the cab dash.

OCCUPANT PROTECTION DRIVER

The driver's position shall be equipped with the Advanced Protection System™ (APS). The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

The driver's seating area APS shall include:

- Advanced seat belt system - retractor pre-tensioner tightens the seat belt around the driver, securing the occupant in the seat and the load limiter plays out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries.
- Large side curtain airbag - protects the driver's head, neck, and upper body from dangerous cab side surfaces and contact points with intrusive surfaces as a result of a collision as well as provides ejection mitigation protection to the driver in a qualifying event by covering the window and the upper portion of the door.
- Dual knee airbags (patent pending) with energy management mounting (patent pending) - protects the driver's lower body from dangerous surface contact injuries, acceleration injuries, and from intrusion as well as locks the lower body in place so the upper body shall be slowed by the load limiting seat belt.

Steering wheel airbag - protects the driver's head, neck, and upper torso from contact

Killingworth Volunteer Fire Company

injuries, acceleration injuries, and contact points with intrusive surfaces as a result of a collision.

SEAT BACK OFFICER

The officer's seat back shall include an IMMI brand SmartDock® Gen 2 hands-free self contained breathing apparatus (SCBA) holder. The hands-free holder shall meet NFPA 1901-03 9G dynamic requirements for cylinder restraint systems for use in crew compartments of emergency response vehicles. The bracket shall accommodate and secure most types of self-contained breathing apparatus cylinders.

The hands-free holder shall consist of a back plate, bottom cradle, non-marring top claws, and claw height adjustment knob. The height adjustment knob shall allow for easy adjustment of the claws to the SCBA. The hands-free holder's claws shall lock from inertial forces to prevent the SCBA from becoming a projectile in the event of a crash to meet the NFPA 1901-03 standard for SCBA retention. The SCBA holder shall offer single-motion insertion into the claws and hands-free release when the SCBA fitted seat occupant rises.

The seat back shall include a removable padded cover which shall be provided over the SCBA cavity.

SEAT MOUNTING OFFICER

The officer's seat shall be installed in an ergonomic position in relation to the cab dash.

OCCUPANT PROTECTION OFFICER

The officer's position shall be equipped with the Advanced Protection System™ (APS). The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

The officer's seating area APS shall include:

- Advanced seat belt system - retractor pre-tensioner tightens the seat belt around the officer, securing the occupant in the seat and the load limiter plays out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries.
- Large side curtain airbag - protects the officer's head, neck, and upper body from dangerous cab side surfaces and contact points with intrusive surfaces as a result of a collision as well as provide ejection mitigation protection to the officer in a qualifying event by covering the window and the upper portion of the door.

Knee airbags - protects the officer's lower body from dangerous surface contact injuries, acceleration injuries, and from contact points with intrusive surfaces as a result of a collision as well as locks the lower body in place so the upper body shall be slowed by the load limiting seat belt.

Killingworth Volunteer Fire Company

POWER SEAT WIRING

The power seat or seats installed in the cab shall be wired directly to battery power.

SEAT BELT ORIENTATION CREW

The crew position seat belts shall follow the standard orientation which extends from the outboard shoulder extending to the inboard hip.

SEAT REAR FACING OUTER LOCATION

The crew area shall include two (2) rear facing crew seats, which include one (1) located directly behind the left side front seat and one (1) located directly behind the right side front seat.

SEAT CREW REAR FACING OUTER

The crew area shall include a seat in the rear facing outboard position which shall be a H.O. Bostrom 500 Series Firefighter model seat. The seat shall feature a tapered and padded seat, and cushion. The seat and cushion shall be spring load hinged and compact in design for additional room. The seat shall include a "Fold and Hold" feature so that the cushion shall remain in the seated position and simply touched to flip up.

The seat shall feature an all belts to seat (ABTS) style of safety restraint. The ABTS feature shall include a three-point shoulder harness with the lap belt and automatic retractor as an integral part of the seat assembly. The buckle portion of the seat belt shall extend from the seat base towards the driver position within easy reach of the occupant. The ABTS feature shall also include the RiteHite™ shoulder adjustment feature to provide enhanced comfort and safety by allowing customized seat belt fit.

The minimum vertical dimension from the seat H-point to the ceiling for each belted seating position shall be 35.00 inches.

This model of seat shall have successfully completed the static load tests by FMVSS 207/210. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity. This model of seat installed in the cab model, as specified, shall have successfully completed the dynamic sled testing using FMVSS 208 as a guide with the following accommodations. In order to reflect the larger size outfitted firefighters, the test dummy used shall be a 95th percentile hybrid III male weighing 225 pounds rather than the 50th percentile male dummy weighing 165 pounds as referenced in FMVSS 208. The model of seats shall also have successfully completed the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which decides the burning rate of materials in the occupant compartments of motor vehicles.

SEAT BACK REAR FACING OUTER

The crew area seat backs shall include an IMMI brand SmartDock® Gen 2 hands-free self contained breathing apparatus (SCBA) holder. The hands-free holder shall meet NFPA 1901-03 9G dynamic requirements for cylinder restraint systems for use in crew compartments of emergency response

Killingworth Volunteer Fire Company

vehicles. The bracket shall accommodate and secure most types of self-contained breathing apparatus cylinders.

The hands-free holder shall consist of a back plate, bottom cradle, non-marring top claws, and claw height adjustment knob. The height adjustment knob shall allow for easy adjustment of the claws to the SCBA. The hands-free holder's claws shall lock from inertial forces to prevent the SCBA from becoming a

projectile in the event of a crash to meet the NFPA 1901-03 standard for SCBA retention. The SCBA holder shall offer single-motion insertion into the claws and hands-free release when the SCBA fitted seat occupant rises.

The seat back shall include a removable padded cover which shall be provided over the SCBA cavity.

SEAT MOUNTING REAR FACING OUTER

The rear facing outer seats shall offer special mounting positions which shall be 2.00 inches towards the rear wall offering additional space between the front seats and the outer rear facing seats.

OCCUPANT PROTECTION RFO

The rear facing outer seat position(s) shall be equipped with the Advanced Protection System™ (APS). The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

Each rear facing outer seating position APS shall include:

- APS advanced seat belt system - retractor pre-tensioners tighten the seat belts around each occupant, securing the occupants in seats and load limiters play out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries.
- Side curtain airbag - protects each occupant's head, neck, and upper body from dangerous cab side surfaces and contact points with intrusive surfaces as a result of a collision as well as provides ejection mitigation protection to each occupant in a qualifying event by covering the windows and walls adjacent to each seating position with an airbag custom designed for each cab configuration.

SEAT FORWARD FACING CENTER LOCATION

The crew area shall include one (1) forward facing center crew seat located directly behind the engine tunnel in the center of the cab on the back wall.

SEAT CREW FORWARD FACING CENTER

The forward facing center seat shall be a H.O. Bostrom 500 Series Firefighter model seat. The seat

Killingworth Volunteer Fire Company

shall feature a tapered and padded seat, and cushion. The seat shall be mounted in a fixed position. The seat and cushion shall be hinged and compact in design for additional room. The seat shall include a "Fold and Hold" feature so that the cushion shall remain in the seated position and simply touched to flip up.

The seat shall feature an all belts to seat (ABTS) style of safety restraint. The ABTS feature shall include a three-point shoulder harness with the lap belt and automatic retractor as an integral part of the seat assembly. The buckle portion of the seat belt shall extend from the seat base towards the driver position within easy reach of the occupant. The ABTS feature shall also include the RiteHite™ shoulder adjustment feature to provide enhanced comfort and safety by allowing customized seat belt fit.

The minimum vertical dimension from the seat H-point to the ceiling for each belted seating position shall be 35.00 inches.

This model of seat shall have successfully completed the static load tests by FMVSS 207/210. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity. This model of seat installed in the cab model, as specified, shall have successfully completed the dynamic sled testing using FMVSS 208 as a guide with the following accommodations. In order to reflect the larger size outfitted firefighters, the test dummy used shall be a 95th percentile hybrid III male weighing 225 pounds rather than the 50th percentile male dummy weighing 165 pounds as referenced in FMVSS 208. The model of seats shall also have successfully completed the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which decides the burning rate of materials in the occupant compartments of motor vehicles.

SEAT BACK FORWARD FACING CENTER

The crew area seat backs shall include an IMMI brand SmartDock® Gen 2 hands-free self contained breathing apparatus (SCBA) holder. The hands-free holder shall meet NFPA 1901-03 9G dynamic requirements for cylinder restraint systems for use in crew compartments of emergency response vehicles. The bracket shall accommodate and secure most types of self-contained breathing apparatus cylinders.

The hands-free holder shall consist of a back plate, bottom cradle, non-marring top claws, and claw height adjustment knob. The height adjustment knob shall allow for easy adjustment of the claws to the SCBA. The hands-free holder's claws shall lock from inertial forces to prevent the SCBA from becoming a projectile in the event of a crash to meet the NFPA 1901-03 standard for SCBA retention. The SCBA holder shall offer single-motion insertion into the claws and hands-free release when the SCBA fitted seat occupant rises.

The seat back shall include a removable padded cover which shall be provided over the SCBA cavity.

OCCUPANT PROTECTION FFC

The forward facing center seat position(s) shall be equipped with the Advanced Protection System™

Killingworth Volunteer Fire Company

(APS). The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

Each forward facing center seating position APS shall include:

- APS advanced seatbelt system - retractor pre-tensioners tighten the seat belts around each occupant, securing the occupants in seats and load limiters play out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries.

Side curtain airbag - provides ejection mitigation protection to each occupant in a qualifying event by covering the windows and walls adjacent to crew seating with an airbag custom designed for each cab configuration.

SEAT FRAME FORWARD FACING

The forward-facing center seating positions shall include an enclosed seat frame located and installed on the rear wall. The seat frame shall measure 42.38 inches wide X 12.38 inches high X 22.00 inches deep. The seat frame shall be constructed of Marine Grade 5052-H32 0.19 inch thick aluminum plate. The seat box shall be painted with the same color as the remaining interior.

SEAT FRAME FORWARD FACING STORAGE ACCESS

There shall be two (2) access points to the seat frame storage area, one (1) on each side of the seat frame. Each access point shall be covered by a hinged door which measures 15.00 inches in width X 10.63 inches in height.

SEAT MOUNTING FORWARD FACING CENTER

The forward facing center seats shall be installed facing the front of the cab.

CAB FRONT UNDERSEAT STORAGE ACCESS

The left and right under seat storage areas shall have a solid aluminum hinged door with non-locking latch.

SEAT COMPARTMENT DOOR FINISH

All under seat storage compartment access doors shall have a multi-tone black-black texture finish.

HELMET STORAGE SHIPLOOSE QUANTITY

The ship loose items shall include four (4) helmet storage brackets.

HELMET STORAGE SHIPLOOSE

The ship loose items shall include Ziamatic model UHH-1 helmet storage designed to meet

Killingworth Volunteer Fire Company

current NFPA regulations. The UHH-1 shall securely fasten fire helmets to flat cab surfaces. The UHH-1 utilizes a helmet hook and an adjustable strap to accommodate nearly any helmet size or configuration.

WINDSHIELD WIPER SYSTEM

The cab shall include a triple arm linkage wiper system which shall clear the windshield of water, ice and debris. There shall be two (2) windshield wipers; each shall be affixed to a radial arm. The wiper motor shall be activated by an intermittent wiper control located within easy reach of the driver's position.

ELECTRONIC WINDSHIELD FLUID LEVEL INDICATOR

The windshield washer fluid level shall be monitored electronically. When the washer fluid level becomes low the yellow "Check Message Center" indicator light on the instrument panel shall illuminate and the message center in the dual air pressure gauge shall display a "Check Washer Fluid Level" message.

CAB DOOR HARDWARE

The cab entry doors shall be equipped with exterior pull handles, suitable for use while wearing firefighter gloves. The handles shall be made of a fiber reinforced plastic composite with a black matt finish.

The interior exit door handles shall be flush paddle type with a black finish, which are incorporated into the upper door panel.

All cab entry doors shall include locks which are keyed alike. The door locks shall be designed to prevent accidental lockout.

DOOR LOCKS

Each cab entry door shall include a manually operated door lock. Each door lock may be actuated from the inside of the cab by means of a red knob located on the paddle handle of the respective door or by using a TriMark key from the exterior. The door locks are designed to prevent accidental lock out.

GRAB HANDLES

The cab shall include one (1) 18.00 inch three-piece extruded aluminum anti-slip exterior grab handle with rubber inserts behind each cab door. The Hansen number 4000 Series Lit Anti-Slip Rails shall be mounted in bright anodized aluminum 4000 Series II stanchions, complete with weep holes to prevent the buildup of moisture.

The grab rails shall include a 12 volt, 17.00 inch long clear LED light to provide an increased margin of safety for night time cab entry and egress. The lights shall only be activated when the parking brake is set and the marker lights are on.

Killingworth Volunteer Fire Company

REARVIEW MIRRORS

Retrac Aerodynamic West Coast style single vision mirror heads model 613285 shall be provided and installed on each of the front cab doors.

The mirrors shall be mounted via 1.00 inch diameter tubular stainless steel arms to provide a rigid mounting to reduce mirror vibration.

The mirrors shall measure 8.00 inches wide X 19.00 inches high and shall include an 8.00 inch convex mirrors with a stainless steel back, model 980-4, installed below the flat glass to provide a wider field of vision. The flat mirrors shall be motorized with remote horizontal and vertical adjustment. The control switches shall be mounted within easy reach of the driver. The convex mirrors shall be manually adjustable. The flat mirror glass shall be heated for defrosting in severe cold weather conditions.

The mirror backs shall be constructed of vacuum formed chrome plated ABS plastic housings that are corrosion resistant and shall include an amber marker light. The mirrors shall be manufactured with the finest quality non-glare glass.

REARVIEW MIRROR HEAT SWITCH

The heat for the rearview mirrors shall be controlled through a rocker switch on the dash in the switchpanel.

EXTERIOR TRIM REAR CORNER

There shall be mirror finish stainless steel scuff plates on the outside corners at the back of the cab. The stainless steel plate shall be affixed to the cab using two sided adhesive tape.

CAB FENDER

Full width wheel well liners shall be installed on the extruded cab to limit road splash and enable easier cleaning. Each two-piece liner shall consist of an inner liner 16.00 inches wide made of vacuum formed ABS composite and an outer fenderette 5.00 inches wide made of SAE 304 polished stainless steel.

MUD FLAPS FRONT

The front wheel wells shall have mud flaps installed on them.

MUD FLAPS Rear

Heavy-duty mud flaps shall be provided and installed to the rear of each front wheel and to the rear of each pair of dual rear wheels. All mud flaps shall be an adequate width to protect apparatus from wheel debris.

Killingworth Volunteer Fire Company

A Full Width mud flap with stainless weights will be mounted under rear step area.

Mud flaps shall be made of heavy duty, semi-flexible vinyl to prevent “sailing”.

CAB EXTERIOR FRONT & SIDE EMBLEMS

The cab shall include three (3) Spartan emblems. There shall be one (1) installed on the front air intakegrille and one (1) emblem on each of the cab sides. The cab shall also include one (1) Advanced Protection System shield emblem on each front door.

IGNITION

A master battery system with a keyless start ignition system shall be provided. Each system shall be controlled by a one-quarter turn Cole Hersee switch, both of which shall be mounted to the left of the steering wheel on the dash. A chrome push type starter button shall be provided adjacent to the master battery and ignition switches.

Each switch shall illuminate a green LED indicator light on the dash when the respective switch is placedin the “ON” position.

The starter button shall only operate when both the master battery and ignition switches are in the “ON”position.

BATTERY

The single start electrical system shall include six (6) Harris BCI 31 925 CCA batteries with a 210 minute reserve capacity and 4/0 welding type dual path starter cables per SAE J541.

BATTERY TRAY

The batteries shall be installed within two (2) stainless steel battery trays located on the left side and rightside of the chassis, securely bolted to the frame rails. The battery trays shall be coated with the same material as the frame.

The battery trays shall include drain holes in the bottom for sufficient drainage of water. A durable, non-conducting, interlocking mat made by Dri-Dek shall be installed in the bottom of the trays to allow for air flow and help prevent moisture build up. The batteries shall be held in place by non-conducting phenolic resin hold down boards.

BATTERY BOX COVER

Each battery box shall include a stainless steel cover which protects the top of the batteries. Each covershall include flush latches which shall keep the cover secure as well as a black powder coated handle forconvenience when opening.

BATTERY CABLE

The starting system shall include cables which shall be protected by 275 degree F.

Killingworth Volunteer Fire Company

minimum hightemperature flame retardant loom, sealed at the ends with heat shrink and sealant.

BATTERY JUMPER STUD

The starting system shall include battery jumper studs. These studs shall be located in the forward mostportion of the driver's side lower step, 8.00 inches apart. The studs shall allow the vehicle to be jump started, charged, or the cab to be raised in an emergency in the event of battery failure.

ALTERNATOR

The charging system shall include a 320 amp Leece-Neville 12 volt alternator. The alternator shallinclude a self-exciting integral regulator.

STARTER MOTOR

The single start electrical system shall include a Delco brand starter motor.

BATTERY CONDITIONER

A Kussmaul Auto Charge 40/20 battery conditioner shall be supplied. The battery conditioner shallprovide a 40 amp output for the chassis batteries and a 20 amp battery saver output. The battery conditioner shall be mounted in the cab in the LH rear facing outer seating position.

BATTERY CONDITIONER DISPLAY

A Kussmaul battery conditioner display shall be supplied. The battery conditioner display shall bemounted in front of the left side door just below the windshield.

AUXILIARY AIR COMPRESSOR

A Kussmaul Auto Pump 120V air compressor shall be supplied. The air compressor shall be installedbehind the officer's seat. The air compressor shall be plumbed to the air brake system to maintain air pressure.

ELECTRICAL INLET LOCATION

An electrical inlet shall be installed on the left hand side of the cab ahead of the front door.

ELECTRICAL INLET

A Kussmaul 20 amp super auto-eject electrical receptacle shall be supplied. It shall automatically ejectthe plug when the starter button is depressed.

A single item or an addition of multiple items must not exceed the rating of the electric inlet

Killingworth Volunteer Fire Company

that it'sconnected to.

Amp Draw Reference List:

<i>Kussmaul 40 LPC Charger:</i>	<i>5 Amps</i>
<i>Kussmaul 40/20 Charger:</i>	<i>8.5 Amps</i>
<i>Kussmaul 80 LPC Charger:</i>	<i>13 Amps</i>
<i>Kussmaul EV-40:</i>	<i>6.2 Amps</i>
<i>Blue Sea P12 7532:</i>	<i>7.5 Amps Iota</i>
<i>DLS-45/IQ4:</i>	<i>11 Amps 1000W</i>
<i>Engine Heater:</i>	<i>8.33 Amps 1500W</i>
<i>Engine Heater:</i>	<i>12.5 Amps 120V Air</i>
<i>Compressor:</i>	<i>4.2 Amps 120V</i>
<i>Dometic HVAC:</i>	<i>15 Amps</i>

ELECTRICAL INLET CONNECTION

The electrical inlet shall be connected to the battery conditioner and the air pump.

ELECTRICAL INLET COLOR

The electrical inlet connection shall include a yellow cover.

HEADLIGHTS

The cab front shall include four (4) rectangular LED headlamps with separate high and low beams mounted in bright chrome bezels. Each lamp shall include a heating system that de-ices the headlight.

HEADLIGHT LOCATION

The headlights shall be located on the front fascia of the cab directly below the front warning lights.

FRONT TURN SIGNALS

The front fascia shall include two (2) Whelen model M6 4.00 inch X 6.00 inch amber LED turn signals which shall be installed in a chrome radius mount housing above and outboard of the front warning and head lamps.

SIDE TURN/MARKER LIGHTS

The sides of the cab shall include two (2) Weldon 9186-8589-24 LED round side marker lights which shall be provided just behind the front cab radius corners.

MARKER AND ICC LIGHTS

In accordance with FMVSS, there shall be five (5) Weldon 9186-1500-20 LED cab marker lamps

Killingworth Volunteer Fire Company

designating identification, center and clearance provided. These lights shall be installed on the face of the cab within full view of other vehicles from ground level.

HEADLIGHT AND MARKER LIGHT ACTIVATION

The headlights and marker lights shall be controlled through a rocker switch within easy reach of the driver. There shall be a dimmer switch within easy reach of the driver to adjust the brightness of the dash lights. The headlamps shall be equipped with the "Daytime Running" light feature, which shall illuminate the headlights when the ignition switch is in the "On" position and the parking brake is released.

INTERIOR OVERHEAD LIGHTS

The cab shall include a two-section, red and clear Weldon LED dome lamp located over each door. The dome lamps shall be rectangular in shape and shall measure approximately 7.00 inches in length X 3.00 inches in width with a black colored bezel. The clear portion of each lamp shall be activated by opening the respective door and both the red and clear portion can be activated by individual push lenses on each lamp.

An additional incandescent three (3) light module with dual map lights shall be located over the engine tunnel which can be activated by individual switches on the lamp.

LIGHTBAR PROVISION

There shall be three (3) light bars installed on the cab roof. The light bars shall be provided and installed by the chassis manufacturer. The light bar installation shall include mounting and wiring to a control switch on the cab dash.

CAB FRONT LIGHTBAR MODEL

The cab shall be provided with one (1) Whelen model K427D0D0 light bar. The light bar shall be 72.00 inches in length and feature eighteen (12) customizable pods. 12 F42DLD Long Duo Red/White Modules & 2 F42WAD Short Duo Red/White End Modules. See the light bar layout for specific details.

CAB FRONT LIGHTBAR

The lightbar provisions shall be for one (1) Whelen brand Freedom IV LED lightbar mounted centered on the front of the cab roof. The lightbar shall be 72.00 inches in length. The lightbar shall feature twelve (12) F42DLD Long Duo Red/White Forward-Facing modules and two (2) F42WAD Short Duo Red/White End modules. The cable shall exit the light bar on the right side of the cab.

LIGHTBAR SWITCH

The light bar switching shall be prewired from the junction box in the roof to behind the switch panel for connection by the OEM.

Killingworth Volunteer Fire Company

CAB SIDE LIGHTBAR

There shall be two (2) Whelen brand K4MR0R0P Mini Freedom IV WCXL lightbars mounted one (1) on the left and one (1) right side of the cab roof parallel to the side of the cab above the left and right rear doors. The lightbars shall be NFPA compliant.

FRONT SCENE LIGHTS

The front of the cab shall include one (1) Whelen Pioneer Summit model S72MW LED scene light shall be installed on the underside of the lightbar with a bracket locating it slightly forward of the light bar and as high as possible without obstructing the light bar.

The housing shall be powder coated white.

FRONT SCENE LIGHT LOCATION

There shall be front scene lights mounted to the underside of the lightbar.

FRONT SCENE LIGHTS ACTIVATION

The front scene lighting shall be activated by a rocker switch.

SIDE SCENE LIGHTS

The cab shall include two (2) Whelen model Pioneer Summit 30 inch LED scene light model S30MW.

SIDE SCENE LIGHT LOCATION

The scene lighting located on the left and right sides of the cab shall be mounted under the side warning lightbar.

SIDE SCENE ACTIVATION

The scene lights shall be activated by two (2) rocker switches located in the switch panel, one (1) for each light, and by opening the respective side cab doors.

GROUND LIGHTS

The ground lighting shall be activated when the parking brake is set, by the opening of the door on the respective cab side, and when the truck is placed into reverse.

GROUND LIGHTS

Each door shall include a Tecniq T44 LED ground light mounted to the underside of the cab step below each door. The lights shall include a polycarbonate lens, a housing which is vibration welded

Killingworth Volunteer Fire Company

and LEDs which shall be shock mounted for extended life.

LOWER CAB STEP LIGHTS

The middle step located at each door shall include a Tecniq T44 LED light which shall activate with the opening of the respective door. The lights shall include a polycarbonate lens, a housing which is vibration welded and LEDs which shall be shock mounted for extended life.

INTERMEDIATE STEP LIGHTS

The intermediate step well area at each door shall include a TecNiq D06 LED light within a chrome housing. The egress step lights shall provide visibility to the step well area for the first step exiting the vehicle. The egress step lights shall activate with entry step lighting.

UNDER BUMPER LIGHTS

There shall be two (2) 4.00 inch round LED ground lights mounted under the bumper. The lights shall include a polycarbonate lens, a housing which is vibration welded, and LEDs which shall be shock mounted for extended life. The under bumper ground lighting shall be interlocked with the park brake.

INTERIOR UNDERDASH LIGHT

The area under the dash shall include two (2) clear lights, one (1) under the left hand dash and one (1) under the right hand dash. The lights shall be activated by the opening of the respective side doors. If the truck is equipped with APS, the under dash light location will be outside of the APS airbag clear zone.

LIGHT TOWER PROVISION

The cab roof shall include reinforcement for a light tower. The reinforcement shall consist of four (4) aluminum pads mounted to the exterior of the cab roof and additional internal cab roof structure. The entire reinforcement shall be integral with the roof for rigidity. The light tower shall be provided and installed by the body manufacturer.

LIGHT TOWER MODEL

The light tower provisions shall be for a Will-Burt Nightscan model 2.3 (NS-7.5) light tower with two (2) 120 volt 150 watt LED Whelen Pioneer Plus light heads and two (2) 1500 halogen light heads.

LIGHT TOWER ORIENTATION

The roof reinforcement shall be installed parallel to the rear wall of the cab.

Killingworth Volunteer Fire Company

LIGHT TOWER HORIZONTAL JUSTIFICATION

The roof reinforcement shall be justified to the center of the cab left to right.

LIGHT TOWER LIGHT HEAD ORIENTATION

The roof reinforcement shall be oriented in order for the light head on the light tower to be to the rightside while in the stored position.

LIGHT TOWER FORE/AFT ORIENTATION

The roof reinforcement shall be oriented on the roof of the cab towards the rear wall of the cab.

ENGINE COMPARTMENT LIGHT

There shall be a LED NFPA compliant light mounted under the engine tunnel for area work lighting on the engine. The light shall include a polycarbonate lens, a housing which is vibration welded and a bulb which shall be shock mounted for extended life. The light shall activate automatically when the cab is tilted.

HEADLIGHT FLASHER

An alternating high beam headlight flashing system shall be installed into the high beam headlight circuit which shall allow the high beams to flash alternately from left to right.

Deliberate operator selection of high beams will override the flashing function until low beams are again selected. Per NFPA, these clear flashing lights will also be disabled "On Scene" when the park brake is applied.

HEADLIGHT FLASHER SWITCH

The flashing headlights shall be activated through a rocker switch on the switch panel. The rocker switch shall be clearly labeled for identification.

INBOARD FRONT WARNING LIGHTS

The cab front fascia shall include two (2) Whelen M6 Super LED front warning lights in the left and right inboard positions. The lights shall feature multiple flash patterns including steady burn for solid colors and multiple flash patterns for split colors. The lights shall be mounted to the front fascia of the cab within a chrome bezel

INBOARD FRONT WARNING LIGHTS COLOR

The warning lights mounted on the cab front fascia in the inboard positions shall be red.

OUTBOARD FRONT WARNING LIGHTS

The cab front fascia shall include two (2) Whelen M6 Super LED front warning lights in the left

Killingworth Volunteer Fire Company

and right outboard positions. The lights shall feature multiple flash patterns including steady burn for solid colors and multiple flash patterns for split colors. The lights shall be mounted to the front fascia of the cab within a chrome bezel.

OUTBOARD FRONT WARNING LIGHTS COLOR

The warning lights mounted on the cab front fascia in the outboard position shall be red.

FRONT WARNING SWITCH

The front warning lights shall be individually prewired to the area behind the switch panel.

INTERSECTION WARNING LIGHTS

The chassis shall include two (2) Whelen M6 V-Series LED intersection warning lights with a chrome bezel, one (1) each side. The lights shall feature multiple flash patterns including steady burn.

INTERSECTION WARNING LIGHTS COLOR

The intersection lights shall be red.

INTERSECTION WARNING LIGHTS LOCATION

The intersection lights shall be mounted on the side of the bumper in the rearward position.

SIDE WARNING LIGHTS

The cab sides shall include two (2) Whelen M6 V-series Super LED warning/perimeter lights, one (1) on each side. The lights shall feature multiple flash patterns including steady burn for solid colors and multiple flash patterns for split colors. The lights shall be mounted to the sides of the cab within a chrome bezel.

SIDE WARNING LIGHTS COLOR

The warning lights located on the side of the cab shall be red.

SIDE WARNING LIGHTS LOCATION

The warning lights on the side of the cab shall be mounted over the front wheel well directly over the center of the front axle.

SIDE AND INTERSECTION WARNING SWITCH

The side and intersection warning lights shall be individually prewired to the area behind the switch panel.

Killingworth Volunteer Fire Company

AUXILIARY GROUND/PERIMETER LIGHTS

There shall be two (2) ground/perimeter lights integrated with the V-Series side warning lights and two (2) ground/perimeter lights integrated with the V-Series intersection warning lights. The ground/perimeter function of the V-series lights shall be activated with the vehicle ground lighting activation circuit.

INTERIOR DOOR OPEN WARNING LIGHTS

The interior of each door shall include one (1) red 4.00 inch diameter Truck-Lite LED warning light located on the door panel. Each light shall activate with a flashing pattern when the respective door is in the open position to serve as a warning to oncoming traffic.

Each door shall also include one (1) 15.87 inch long X 0.73 inch tall amber Weldon LED warning light. The light shall be located on the upper portion of the door frame to be visible when a person is standing in front of the door while entering or exiting the cab. Each light shall activate with a scrolling directional flash pattern which moves from inside to outside when the door is in the open position. This shall serve as an additional warning to oncoming traffic.

SIREN CONTROL HEAD

A Whelen 295HFSA7 electronic siren control head with remote dual amplifier shall be provided and flush mounted in the switch panel with a location specific to the customer's needs. The siren shall feature 200-watt output, radio broadcast, public address, wail, yelp, or piercer tones and hands free operation which shall allow the operator to turn the siren on and off from the horn ring if a horn/siren selector switch option is also selected.

STEERING WHEEL HORN BUTTON SELECTOR SWITCH

A rocker switch shall be installed in the switch panel between the driver and officer to allow control of either the electric horn or the air horn from the steering wheel horn button. The electric horn shall sound by default when the selector switch is in either position to meet FMCSA requirements.

There will be a Left side foot switch, a right side panel mounted push button labeled siren and a rocker break switch

AIR HORN FOOT SWITCH LH

The air horn foot switch shall be a Linemaster model 491-S.

AIR HORN FOOT SWITCH LH LOCATION

The air horn foot switch shall be located on the left hand side accessible to the driver between the steering column and the door.

Killingworth Volunteer Fire Company

AIR HORN FOOT SWITCH LH POSITION

The air horn foot switch shall be positioned inboard of any other foot switch, if applicable.

MECHANICAL SIREN FOOT SWITCH LH

The mechanical siren foot switch shall be a Linemaster model 491-S.

MECHANICAL SIREN FOOT SWITCH LH LOCATION

The mechanical siren foot switch shall be located on the left hand side accessible to the driver between the steering column and the door.

MECHANICAL SIREN FOOT SWITCH LH POSITION

The mechanical siren foot switch shall be positioned outboard of any other foot switch, if applicable.

AUDIBLE WARNING LH FOOT SWITCH BRACKET

A 30.00 degree angled foot switch bracket, wide enough to accommodate (2) foot switches, shall be installed outboard of the steering column for specified driver accessible foot switch activations.

MECHANICAL SIREN PUSH BUTTON SWITCH RH

The mechanical siren push button momentary switch shall be located on the right hand switch panel. The button will be labeled "Siren"

MECHANICAL SIREN FOOT SWITCH RH LOCATION

The mechanical siren foot switch shall be temporarily tied up with a coiled wire drop at the firewall inboard for installation by the customer on the right hand side accessible to the officer.

AIR HORN AUXILIARY ACTIVATION

The air horn activation shall be accomplished by a black momentary push button on the switch panel. An air horn activation circuit shall be provided to the chassis harness pump panel harness connector.

MECHANICAL SIREN BRAKE/AUXILIARY ACTIVATION

A red momentary siren brake rocker switch shall be provided in the switch panel on the dash.

Killingworth Volunteer Fire Company

MECHANICAL SIREN INTERLOCK

The siren shall only be active when master warning switch is on to prevent accidental engagement.

BACK-UP ALARM

An ECCO model 575 backup alarm shall be installed at the rear of the chassis with an output level of 107 dB. The alarm shall automatically activate when the transmission is placed in reverse.

AUXILIARY SIREN CONTROL HEAD

The chassis shall include a cutout in the center dash switch panels for a panel mount Whelen Control model CANCTL3 electronic siren and warning light control head. The control head shall be pre-wired for power behind the dash and a panel mount bracket shall be shipped loose to allow for panel mount installation.

INSTRUMENTATION

An ergonomically designed instrument panel shall be provided. Each gauge shall be backlit with LED lamps. Stepper motor movements shall drive all gauges. The instrumentation system shall be multiplexed and shall receive ABS, engine, and transmission information over the J1939 data bus to reduce redundant sensors and wiring.

A twenty eight (28) icon lightbar message center with integral LCD odometer/trip odometer shall be included. The odometer shall display up to 999,999.9 miles. The trip odometer shall display 9,999.9 miles. The LCD message center screen shall be capable of custom configuration by the users for displaying certain vehicle status and diagnostic functions.

The instrument panel shall contain the following gauges:

- One (1) three-movement gauge displaying vehicle speed, fuel level, and Diesel Exhaust Fluid (DEF) level. The primary scale on the speedometer shall read from 0 to 100 MPH, and the secondary scale on the speedometer shall read from 0 to 160 KM/H. The scale on the fuel and DEF level gauges shall read from empty to full as a fraction of full tank capacity. Red indicator lights in the gauge and an audible alarm shall indicate low fuel or low DEF at 1/8th tank level.
- One (1) three-movement gauge displaying engine RPM, and primary and secondary air system pressure shall be included. The scale on the tachometer shall read from 0 to 3000 RPM. The scale on the air pressure gauges shall read from 0 to 150 pounds per square inch (PSI) with a red line zone indicating critical levels of air pressure. Red indicator lights in the gauge and an audible alarm shall indicate low air pressure.
- One (1) four-movement gauge displaying engine oil pressure, coolant temperature, voltmeter, and transmission temperature shall be included. The scale on the engine oil pressure gauge shall read from 0 to 100 pounds PSI with a red line zone indicating critical levels of oil pressure. A red indicator light in the gauge and audible alarm shall indicate low engine oil pressure. The scale on the coolant temperature gauge shall read from 100 to 250 degrees Fahrenheit (°F) with

Killingworth Volunteer Fire Company

a red line zone indicating critical coolant temperatures. A red indicator light in the gauge and audible alarm shall indicate high coolant temperature. The scale on the voltmeter shall read from 9 to 18 volts with a red line zone indicating critical levels of battery voltage. A red indicator light in the gauge and an audible alarm shall indicate high or low system voltage. The low voltage alarm shall indicate when the system voltage has dropped below 11.8 volts for more than 120 seconds in accordance with the requirements of NFPA 1901. The scale on the transmission temperature gauge shall read from 100 to 300 degrees °F with a red line zone indicating critical temperatures. A red indicator light in the gauge and an audible alarm shall indicate a high transmission temperature.

The light bar portion of the message center shall include twenty-eight (28) LED backlit indicators. The lightbar shall be split with fourteen (14) indicators on each side of the LCD message screen. The lightbar shall contain the following indicators and produce the following audible alarms when supplied in conjunction with applicable configurations:

RED INDICATORS

Stop Engine - indicates critical engine fault
Air Filter Restricted - indicates excessive engine air intake restriction
Park Brake - indicates parking brake is set
Seat Belt - indicates a seat is occupied and corresponding seat belt remains unfastened
Low Coolant - indicates critically low engine coolant
Cab Tilt Lock - indicates the cab tilt system locks are not engaged.

AMBER INDICATORS

Malfunction Indicator Lamp (MIL) - indicates an engine emission control System fault
Check Engine - indicates engine fault
Check Transmission - indicates transmission fault
Anti-Lock Brake System (ABS) - indicates anti-lock brake system
Fault High exhaust system temperature – indicates elevated exhaust Temperatures
Water in Fuel - indicates presence of water in fuel filter
Wait to Start - indicates active engine air preheat
Cycle Windshield Washer Fluid – indicates washer fluid is low
DPF restriction - indicates a restriction of the diesel particulate filter
Regen Inhibit - indicates regeneration of the DPF has been inhibited by the operator
Range Inhibit - indicates a transmission operation is prevented and requested shift request may not occur.
SRS - indicates a problem in the supplemental restraint system
Check Message - indicates a vehicle status or diagnostic message on the LCD display requiring attention.

GREEN INDICATORS

Left and Right turn signal indicators
ATC - indicates low wheel traction for automatic traction control equipped vehicles, also indicates mud/snow mode is active for ATC system

Killingworth Volunteer Fire Company

High Idle - indicates engine high idle is active. Cruise Control - indicates cruise control is enabled OK to Pump - indicates the pump is engaged and conditions have been met for pump operations Pump Engaged - indicates the pump transmission is currently in pump gear Auxiliary Brake - indicates secondary braking device is active

BLUE INDICATORS

High Beam indicator

AUDIBLE ALARMS

Air Filter Restriction
Cab Tilt Lock
Check Engine
Check Transmission
Open Door/Compartment
High Coolant Temperature
High or Low System Voltage
High Transmission Temperature
Low Air Pressure
Low Coolant Level
Low DEF Level
Low Engine Oil Pressure
Low Fuel
Seatbelt Indicator
Stop Engine
Water in Fuel
Extended Left/Right Turn Signal On
ABS System Fault

BACKLIGHTING COLOR

The instrumentation gauges and the switch panel legends shall be backlit using red LED backlighting.

APPARATUS PANEL INSTRUMENTATION

One (1) fuel level gauge and one (1) diesel exhaust fluid (DEF) gauge shall be shipped loose with the cab and chassis for the body builder to install. The DEF gauge shall display the diesel exhaust fluid level as a bar graph which shall provide a yellow warning indication once the level has dropped below 12.5 percent and a red warning indication once the level has dropped below to 5 percent.

Killingworth Volunteer Fire Company

RADIO

A Panasonic radio with weather band, AM/FM stereo receiver, compact disc player, and four (4) speakers shall be installed in the cab. The radio shall be installed above the driver position. The speakers shall be installed inside the cab with two (2) speakers recessed overhead in the front portion of the cab rearward of the windshields and two (2) speakers on the upper rear wall of the cab.

AM/FM ANTENNA

A small antenna shall be located on the left hand side of the cab roof for AM/FM and weather band reception.

COMMUNICATION ANTENNA

An antenna base, for use with an NMO type antenna, shall be mounted on the right hand front corner of the cab roof so not to interfere with light bars or other roof mounted equipment installed by chassis builder. The antenna base shall be an Antenex model MABVT8 made for either a 0.38 inch or 0.75 inch receiving hole in the antenna and shall include 17.00 foot of RG58 A/U cable with no connector at the radio end of the cable. The antenna base design provides the most corrosion resistance and best power transfer available from a high temper all brass construction and gold plated contact design. The antenna base shall be chassis builder supplied.

COMMUNICATION ANTENNA CABLE ROUTING

The antenna cable shall be routed from the antenna base mounted on the roof to the area inside the center rocker switch console.

AUXILIARY COMMUNICATION ANTENNA

An auxiliary antenna base, for use with an NMO type antenna, shall be installed on the cab. The antenna base shall be an Antenex model MABVT8 and shall include 17.00 foot of RG58 A/U cable with no connector at the radio end of the cable. The antenna shall be mounted on the left hand front corner of the cab roof so not to interfere with light bars or other roof mounted equipment installed by chassis builder. The antenna base shall be chassis builder supplied.

AUXILIARY COMMUNICATION ANTENNA CABLE ROUTING

The auxiliary antenna cable shall be routed from the antenna base mounted on the roof to the area inside the center rocker switch console.

CAB EXTERIOR PROTECTION

The cab face shall have a removable plastic film installed over the painted surfaces to protect the paint finish during transport to the body manufacturer.

Killingworth Volunteer Fire Company

FIRE EXTINGUISHER

A 2.50 pound D.O.T approved fire extinguisher with BC rating shall be shipped loose with the cab.

DOOR KEYS

The cab and chassis shall include a total of four (4) door keys for the manual door locks.

DIAGNOSTIC SOFTWARE OCCUPANT PROTECTION

Diagnostic software for the Spartan Advanced Protection System shall be available for free download from the Spartan Chassis website to Spartan authorized OEMs, dealers and service centers, as well as the vehicle owner.

The software has been validated to be compatible with the following RP1210 interface adapters:

- Dearborn Group DPA4 Plus
- Noregon Systems JPRO® DLA+
- Cummins INLINE5
- Cummins INLINE6
- NexIQ™ USB-Link™

The software and adapter utilize the SAE J1939-13 heavy duty nine (9) pin connector which is located below the driver's side dash to the left of the steering column.

WARRANTY

Summary of Warranty Terms:

THE FOLLOWING IS SUMMARY OF WARRANTY TERMS FOR INFORMATION ONLY. THE ACTUAL LIMITED WARRANTY DOCUMENT, WHICH IS ATTACHED TO THIS OPTION, CONTAINS THE COMPLETE STATEMENT OF THE SPARTAN FIRE CHASSIS LIMITED WARRANTY. SPARTAN'S RESPONSIBILITY IS TO BE ACCORDING TO THE TERMS OF THE COMPLETE LIMITED WARRANTY DOCUMENT.

The chassis manufacturer shall provide a limited parts and labor warranty to the purchaser of the custombuilt cab and chassis for a period of thirty-six (36) months, or the first 50,000 miles, whichever occurs first. The warranty period shall commence on the date the vehicle is delivered to the first end user.

CHASSIS OPERATION MANUAL

There shall be two (2) digital copies of the chassis operation manual provided with the chassis. The digital data shall include a parts list specific to the chassis model.

ENGINE AND TRANSMISSION OPERATION MANUALS

The following manuals specific to the engine and transmission models ordered will be included

Killingworth Volunteer Fire Company

with the chassis in the shop loose items:

- (2) Hard copies of the Engine Operation and Maintenance manual digital copy.
- (2) Digital copies of the Transmission Operator's manual
- (2) Digital copies of the Engine Owner's manual

ENGINE SERVICE MANUALS

There shall be one (1) printed hard copy set of Cummins engine service reference manuals which shall be provided with the chassis.

TRANSMISSION SERVICE MANUALS

There shall be one (1) printed hard copy set of Allison 3000 transmission service manuals included with the chassis.

CAB/CHASSIS AS BUILT WIRING DIAGRAMS

The cab and chassis shall include two (2) complete sets of wiring schematics and option wiring diagrams. One (1) set shall be a printed hard copy, one (1) set shall be a digital copy.

AS BUILT FUEL PLUMBING DIAGRAM

The cab and chassis shall include one (1) digital copy of the as built fuel system plumbing diagram.

PAINT CONFIRMATION

There shall be a paint confirmation letter sent to the body manufacturer with paint spray outs to confirm the cab primary paint color or primary and secondary paint color as specified by the paint options.

DRIVELINE LAYOUT CONFIRMATION

During the design phase of the chassis the Spartan Chassis driveline engineer shall submit the driveline layout to an OEM engineer to review the chassis design for any potential problems integrating the OEM body to the chassis. The OEM engineer shall provide approval to the driveline engineer prior to driveline bills of materials being released.

Killingworth Volunteer Fire Company

Body Specification

New Spartan Chassis:

A new 2021/2022 Spartan Fire Chassis will be provided. This chassis will meet the specifications set forth by the Killingworth Vol. Fire Company. The chassis will be a Spartan Metro Star MFD chassis. Details will be approved prior to ordering. The new chassis will reflect all current NFPA and safety regulations. Color: Killingworth Green.

Front Bumper Winch:

The front bumper shall include a Ramsey 15k hydraulic winch will be installed in the center of the front bumper with 120 feet of ½ inch cable, clevis hook and fairlead. The winch shall be operated by hydraulic controls as well as a hand pendant. It shall feature an easy-to-use free spooling clutch. The winch will run off the trucks transmission port and have a separate switch inside the cab to engage and disengage. The switch location will be determined at preconstruction. The winch will be able to be operated with the parking brake off.

Body Refurbishment:

The apparatus body will be removed from the current chassis. The body shall be properly stripped, prepared, and repainted with both paint and clear coat, with existing colors. All removable items such as brackets, compartment doors, door latches, door hinges, trim, equipment, shelving, etc. will be removed and painted separately to ensure paint behind all mounted items. All cracks, corrosion, and body damage will be repaired prior to pant work being completed. All doors will be removed from the body.

All doors will have new latches, weather stripping, seals/gaskets and hinges replaced.

There shall be a warranty of a minimum of ten (10) years on the body/underbody paint, lettering, and stripping.

All lighting will be removed from the body. Body work will be performed in specified areas to removing mounting for old lighting. Old mounting holes will be used, wherever possible, to mount new lighting.

Provide and install new LED compartment lighting inside and outside.

Cover current cab access hole in body.

Provide and install new reflective black striping on the sides of the apparatus with a design to be approved by the Killingworth Vol. Fire Company.

Current compartment under walk in access door will be modified to fit new fuel tank.

All diamond plate will be replaced with new diamond plate on the apparatus.

Identify new location for eye hooks on rear face of body and install.

Killingworth Volunteer Fire Company

There shall be a class five commercial duty receiver mounted below the rear body access step. This will be completed with a new subframe assembly.

Install a new generator housing compartment on the top side of the current body. Space in the current walk in will be modified to fit the new generator. Space will be towards the front of apparatus. The generator Harrison Hydra Gen Vulcan LPG 8.0 KW.

Rub Rail Construction:

The protection of the apparatus body full length along the side of the vehicle is of critical importance. The rub rail assembly shall be of polished 2" x 1" x 16 gage stainless steel tubing. Rails are spaced out from body with nylon washers and fastened to the body with stainless steel bolts and nuts. Rails are polished to a mirror finish. This assembly shall blend into the front and rear corners of the body, and rolled radius of the wheel assembly.

Wheel Chocks:

Two (2) Ziamatic N.F.P.A. approved wheel chocks shall be supplied and installed per KVFC direction.

Rear Chevron Striping:

Remove the diamond plate overlay from the rear facing vertical surface of the apparatus. Provide and install retro reflective chevrons to the rear of the apparatus covering at least 50 % of the rear facing vertical surface, also to be discussed with committee prior to install of chevrons. Each stripe will be a single-color alternating between red and yellow. Each stripe will be 6 inches in width. Each stripe will slope downward at a 45-degree angle away from the center line of the apparatus. A large blue "R" will be installed above the rear taillights on the left rear. A large blue "8" will be installed above the rear taillights on the right rear.

Undercarriage/Sub-frame:

Once the body has been removed:

Remove the sub frame from the body.

Power wash entire undercarriage of body. Sand all areas of subframe and body that are identified as needing repair.

Prime the entire undercarriage and paint with rust inhibitor. Finish under side of body with rubberized undercoating.

Treat entire painted undercarriage with "Ironclad" protective coating.

Re-install the body to the new Spartan Chassis or equivalent.

Lighting Upgrades:

Chassis will include the following:

Whelen 72" Freedom Light Bar – Design to match current E-5

(2) – Whelen Mini Edge light bars – Design to match current E-5

Killingworth Volunteer Fire Company

- (4) M6 series lights, (2) per front light housing
- (4) M6 V series warning / ground lights – 2 per side

Cab Scene Lighting

- (1) Whelen Pioneer Summit 72-inch LED brow light model S72MW
- (2) Whelen Pioneer Summit 30-inch LED scene light model S30MW

Body will include the following:

Side

- (2) Whelen model M6-V (one per side)
- (4) Whelen model M9 (two per side)

Rear

- (4) Whelen M9
 - (2) Whelen M6
- One (1) Whelen TAL-65 LED traffic advisor will be surface mounted on the rear of body.

Scene Lighting

- Remove current body scene lighting
- Provide (4) Whelen PCPSM2C scene lights, two per side
- Provide (2) Whelen PCPSM1C scene lights, two on rear face
- All scene lights to be 12v

Body Electrical:

All current wiring/harnesses will be removed from the current body and replaced with new wiring/harnesses.

110v power will be run to every body compartment, except for the predesignated compartment which will be used to store flammable fuels. At present time, that compartment is L4 (drivers side rear most).

One outlet per compartment will be provided and installed.

All outlets will be wired to shoreline power only, meaning outlets will only be live when apparatus is connected to an exterior power source.

A Kussmaul Auto 12 will be supplied and install on the body. This unit will supply and regulate the shoreline power going to the 110v receptacles inside the body.

A Kussmaul 20-amp super auto-eject electrical receptacle will be supplied. It will automatically eject the plug when the starter button is depressed. This plug will be used to supply shoreline power to the body while plugged in. This is the second Kussmaul unit that will be used, the first to be located on the chassis and used to supply the chassis batteries.

There shall be a 12-volt inverter to run the refrigerator while the truck is not plugged into shore power.

Body A/C – Heat:

Dometic Penguin II 13.5K roof top RV air conditioning unit will be supplied and installed on the roof of the existing body. This unit will be an A/C – Heat Pump combination unit that will be used to provide the climate control for the walk-in rescue body. Unit will be low profile to reduce the overall height of the apparatus. Unit will have a single vent and control panel in the ceiling of the

Killingworth Volunteer Fire Company

walk-in body. Location will be discussed and agreed upon with the manufacture and the Truck committee at the pre-construction meeting.

Generator:

Current PTO generator will not be reused on the new chassis.

A new Harrison Hydra Gen Vulcan LPG 8.0 KW generator will be provided and install on the body. A new body compartment will need to be fabricated to house this unit. Current space inside the walk in will be eliminated.

A new breaker panel will be supplied and installed along with new breakers for all circuits including, cord reels and light tower. Placement of the breaker panel will be determined at preconstruction.

Light Tower:

The light tower provisions shall be for a Will-Burt Night scan model 2.3 (NS-7.5) light tower with two (2) 120-volt 150-watt LED Whelen Pioneer Plus light heads and two (2) 1500 halogen light heads.

The light tower shall be mounted on the cab.

Equipment Mounting:

There will be a \$15,000.00 equipment mounting allowance to cover costs of relocating equipment. Both existing (if okayed by committee) and new mounts will be used. All noted shelves, stationary or pull out, will be provided as part of the bid amount.

Transverse Compartment

The transverse compartment will include 3 adjustable shelves. The Compartment will include unistrut on both sides running from floor to ceiling where applicable. The shelves shall carry a Little Giant Ladder, Ice Rescue Sled, and a Stokes Basket. It will include 6 plastic or PVC tubes that will hold Res-Q-Jack Apex X Struts, Paratech Struts & Rescue 42 Telecrib Jr. struts. Paratech strut bases, tips and straps will be in this compartment. 2 six-foot and 2 eight-foot NY roof hooks shall be in the compartment. Cold water rescue poles and the adapters shall be in this compartment. 6 pickets and tension stacks will be in this compartment. A 5-gallon bucket of speedy dry shall be in this compartment. This compartment will have storage for 3 push broom heads and handles. All compartment lighting will be LED. Compartment will be discussed and agreed upon with the manufacture and the Truck committee at the preconstruction meeting.

Drivers Side Compartment 2

Drivers side compartment 2 will include an adjustable divider with unistrut on both sides running from floor to ceiling where applicable. It will include 4 adjustable shelves. A pull-out tray will be mounted on the floor of the compartment on one side of the divider. This compartment will carry 8 personnel floatation devices, inflatable boat and boat motor, electric vent fan, cord reels and a bag of electrical pig tale adapters, portable scene lighting, cold water tag lines and 2 ice/cold water horse collars. All compartment lighting will be

Killingworth Volunteer Fire Company

LED. Compartment will be discussed and agreed upon with the manufacture and the Truck committee at the preconstruction meeting.

Drivers Side Compartment 3

Drivers side compartment 3 will include an adjustable divider with unistrut on both sides running from floor to ceiling where applicable. It will include 2 adjustable shelves. It will include 1 adjustable out and down tray. This compartment will include 110volt outlet for charging when truck is plugged into shore power. All compartment lighting will be LED. Compartment will be discussed and agreed upon with the manufacture and the Truck committee at the preconstruction meeting.

Drivers Side Compartment 4

Drivers side compartment 4 will include unistrut on both sides running from floor to ceiling where applicable. A pull-out tray mounted on the floor with a 500pound weight capacity. It will include an adjustable pull-out tray with a 250pound weight capacity shall be mounted in this compartment. It will include an adjustable out and down tray with a 250pound weight capacity. Gas and oil holders will be mounted in this compartment. This compartment will carry 2 gas powered chainsaws, a Honda EU2000i generator, gas powered cut off saw, a battery powered cut off saw, battery powered blower, battery powered chain saw, gas and oil. All compartment lighting will be LED. Compartment will be discussed and agreed upon with the manufacture and the Truck committee at the preconstruction meeting.

Officers Side Compartment 1

Officers side compartment 1 will include a full width pull out tray mounted to the floor with a 500pound weight capacity. This tray will carry a compliment of eDraulic rescue tools (spreader, cutter, combi tool & 2 rams), TL9, TL9 pad and spare batterie. A fixed shelf will go above the pull up tray and an adjustable divider with unistrut running from floor to ceiling where applicable will mount to the fixed shelf. 2 adjustable shelves will go on the right side of the divider. This compartment will carry cribbing packs, 4 step chocks, 2 battery powered Sawzall's, 2 crash bags, brake pedal cutter. All compartment lighting will be LED. Compartment will be discussed and agreed upon with the manufacture and the Truck committee at the preconstruction meeting.

Officers Side Compartment 2

Officers side compartment 2 will include a 7-slot compartment that will hold assorted airbags and plywood pads. An adjustable divider with unistrut on one side running from floor to ceiling where applicable. It will include 2 adjustable shelves. This compartment will carry an airbag control kit and hoses, airbag supply pack, miscellaneous tool kit. All compartment lighting will be LED. Compartment will be discussed and agreed upon with the manufacture and the Truck committee at the preconstruction meeting.

Officers Side Compartment 4

Officers side compartment 4 will include unistrut on both sides of the compartment running from floor to ceiling where applicable. A full width heavy-duty pull-out tray with a 500pound weight capacity that will carry 4 3/8's chains and clevis shackles and chain binders will be mounted to floor of the compartment. A full width adjustable pull-out tray will carry a grip hoist and cable and accessories. 2 adjustable out and down trays will be

Killingworth Volunteer Fire Company

mounted in this compartment. The 2 out and down shelves will carry bolt cutters, sledgehammer, brush cutting shears, other miscellaneous hand tools and assorted lifting slings. All compartment lighting will be LED. Compartment will be discussed and agreed upon with the manufacture and the Truck committee at the preconstruction meeting.

Walk-In

The walk-in area compartments will have the plexiglass bypass doors and the old net closures removed and new net closures will be installed on all compartments. The rear compartments on the driver's side and officer's side of the walk-in will hold 12, 5.5 SCBA 45-minute cylinders. A new refrigerator will be installed. The existing bench seat will be reupholstered with a heavy-duty fabric. All compartment lighting will be LED. Compartment will be discussed and agreed upon with the manufacture and the Truck committee at the preconstruction meeting. There shall be 110-volt outlet to run the refrigerator in determined location. There shall be a light switch/switches to turn on and off inside lighting while the truck is plugged into shore power and when not plug into shore power.

Under-Body Boxes (Drivers side & Officers side)

The under-body boxes shall stay on the body unless the body is higher than it sits now on its current chassis. The new under-body boxes will be pull out style. Compartment will be discussed and agreed upon with the manufacture and the Truck committee at the preconstruction meeting.

Unforeseen Expenses:

There shall be an allowance of \$10,000.00 dollars for unforeseen expenses that may occur during the body refurbishment.

Preconstruction:

There shall be a preconstruction meeting prior to ordering new cab and chassis.

There shall be a preconstruction meeting reviewing all details of the body refurbishment before any work is started.

Inspections:


Inspections trips will be scheduled at mutually agreed upon intervals.

There shall be inspection trips when cab and chassis is delivered, body is removed from current chassis, after body has been stripped of old paint, wiring and prior to any new painting being done, when body is painted, when new wiring is being installed, when body is placed on new cab and chassis, as shelving and equipment are being installed, and final inspection.


Killingworth Volunteer Fire Company

This is a general idea of what we would like for a layout of the compartments. Not to scale.

Drivers Side:

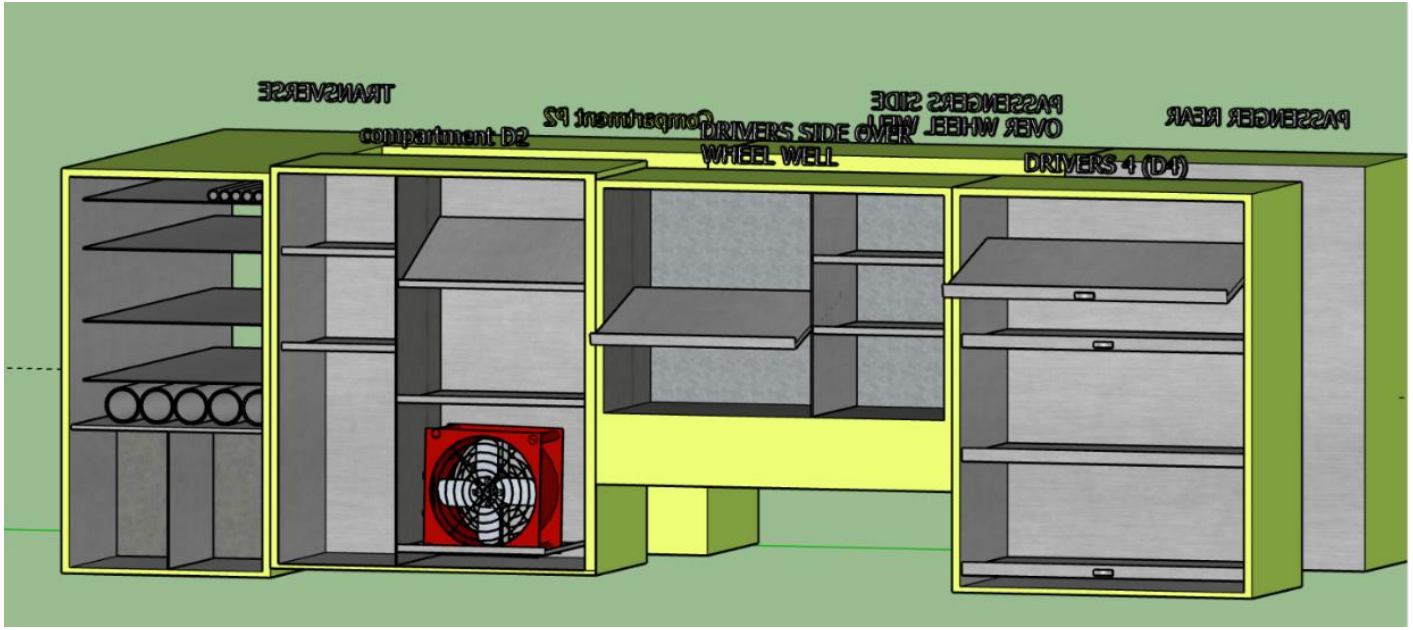

Officers Side:

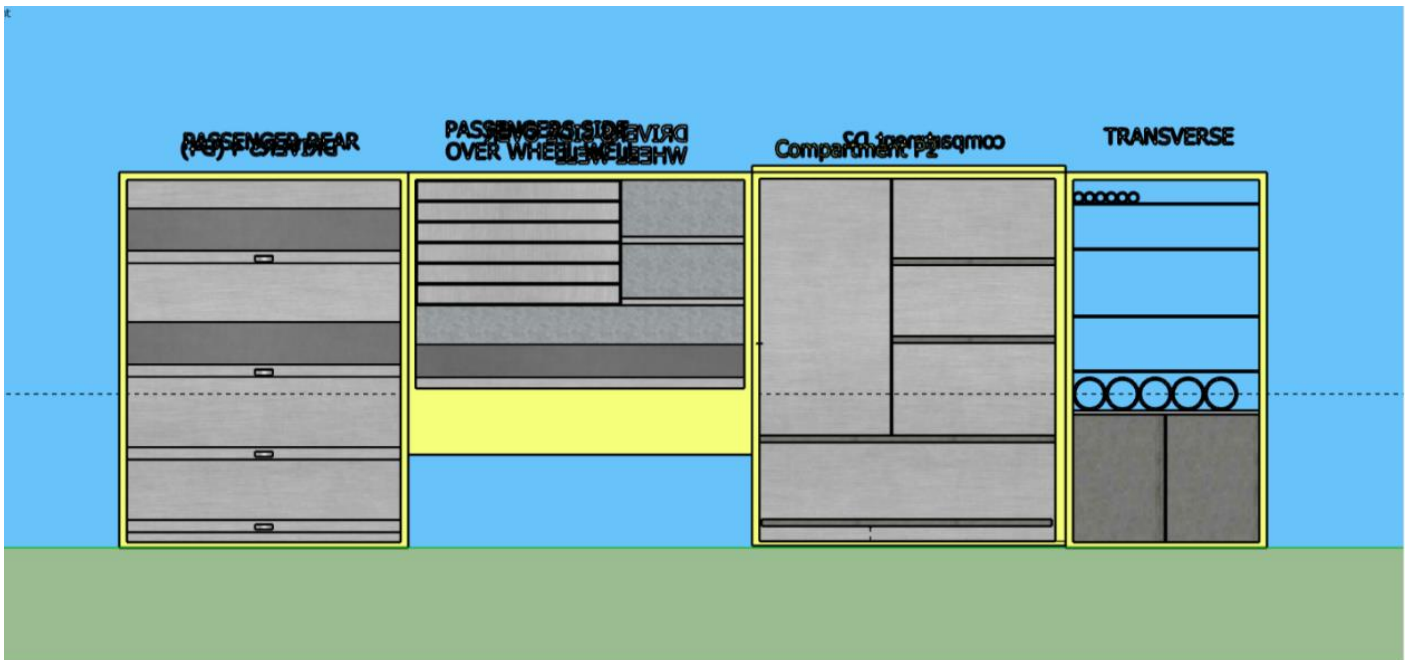

Killingworth Volunteer Fire Company

Optional Equipment List:

- RIT High Point Anchor System (allhandsfire.com SKU: RIT-A1118)
- TU-28 Grip Hoist Rescue Kit (as described on tractel.com)
- Ramfan Electric Powered Positive Pressure Ventilator 16inch w/Toggle-115volt-w/PowerStream (TheFireStore.com model#W-EB80600)
- Little Giant Velocity Model 17 Ladder
- (2) DeWalt LED cordless tripod light 20volt max
- Honda EU2000 Generator
- Stihl MSA 200 C-B battery saw
- Stihl BGA 57 Battery Blower
- (2) Stihl MS 461R vent saw
- DeWalt 20-volt max 4-1/2inch angle grinder kit
- (2) DeWalt 60-volt max Reciprocating Saw Kits (supplyhouse.com model# DCS388T2)
- Hilti TE 30-A36 Rotary Hammer
- B/A shortening chains G100
- B/A G100 Hi-Vis Chain assembly with twist lock cradle grab hooks (10foot) & (15foot)
- Lift-All G100 Adjust-A-Link sling
- Lift-All Tuflex Round Slings: (1) Blue (21,200LBS) 10-foot, (1) Red (13,200LBS)20foot
- (2) Sets of Irons: 8LBS axe & 30inch Pro-bar
- NY Roof Hook with Chisel End (2) 6-foot, (2) 8-foot, (2) 10-foot
- MSA Evolution 6000 basic Thermal Imaging Camera Kit
- Scott Fast Attack R.I.T. Pack with 30-minute cylinder
- Res-Q-Jack Apex X Struts with 12inch extension
- Hurst eDraulic Tools:
 - S 799 E3 cutter
 - SP 777 E3 spreader
 - SC 758 E3 combi tool
 - R 522 E3 ram
 - R 521 E3 ram
- TL9 for spreader
- TL9 for combi tool
- Achilles FRB series inflatable boat (FRB-104 2021)
- 2021 Honda 9.9 HP BF10D3SH Outboard Motor
- Rescue 42 Telecrib Jr. Strut Kit
- (5) LED Vulcan stream lights with chargers
- 2.5gallon pressurized water can with adjustable carrying harness
- (2) Kenwood VP 6000 series UHF model;VP6330-F2 w/ Kenwood speaker mic both colored green
- (2) Mustang ice commander pros suits
- (2) Petzl AVAO BOD Fast harness